

CONTINUING (1.53(b)) UTILITY PATENT APPLICATION TRANSMITTAL

(Only for continuing applications under 37 CFR 1.53(b))

Attorney Docket No.
826.1034C2D2D2

First Named Inventor: Shoji HAYASHIDA

Title: An Electronic Cashless System

Express Mail Label No.

APPLICATION ELEMENTS
See MPEP chapter 600 concerning utility patent
application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 64]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 20]
4. ☒ Oath or Declaration [Total Pages: 1]
 - a. ☐ Newly executed (original or copy)
 - b. ☒ Copy from a prior application (37 CFR 1.63(d)) (see Box 18)
5. ☐ This application is filed by fewer than all the inventors named in the prior nonprovisional application.
 - a. ☐ DELETE the following inventor(s) named in the prior nonprovisional application:
 - b. ☐ The inventor(s) to be deleted are set forth on a separate sheet attached hereto.
6. ☒ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
7. ☐ Microfiche Computer Program (Appendix)
8. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) [] Power of Attorney
11. ☐ English Translation Document (if applicable)
12. ☒ Foreign priority benefit under 35 U.S.C. §119 is claimed.
 - a. ☒ Certified Copy of Priority Document(s) filed in prior application No. 07/578,234.
 - b. ☐ Certified Copy of Priority Document(s) enclosed.
 - c. ☐ Certified Copy of Priority Document(s) to follow.
13. ☒ Information Disclosure Statement (IDS)/PTO-1449 [] Copies of IDS Citations
14. ☒ Preliminary Amendment
 - a. ☐ enclosed herewith.
 - b. ☒ incorporated herein (see Box 18).
15. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
16. ☐ Small Entity Statement(s) [] Statement filed in prior application, status still proper and desired.
17. ☐ Other:

18. CONTINUING APPLICATION, check appropriate box and supply the requisite information below:

☐ Continuation ☒ Divisional ☐ Continuation-in-part (CIP) of prior application No: 09/365,032

Prior application information: Examiner: H. Pitts

Group/Art Unit: 2876

* * *

Preliminary Amendment:

☒ Cancel in this application original claims 2-17 of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)

☒ Amend the specification by inserting before the first line the sentence:


--This application is a divisional of application number 09/365,032, filed August 2, 1999, now pending, which is a divisional of 08/656,913, filed June 3, 1996 now U.S. Patent No. 6,003,767, which is a divisional of 08/279,856, filed on July 26, 1994, now U.S. Patent No. 6,003,762, which is a continuation of 07/959,458, filed October 9, 1992, now abandoned, which is a continuation of 07/578,234, filed September 6, 1990, now abandoned.--

19. NEW CORRESPONDENCE ADDRESS * CUSTOMER NO. 21,171

STAAS & HALSEY LLP
700 Eleventh Street, N.W.
Suite 500
Washington, DC 20001

Telephone: (202) 434-1500
Facsimile: (202) 434-1501

20. SIGNATURE OF ATTORNEY OR AGENT

NAME	Mehdi Sheikerz	REGISTRATION NO.	41,307
SIGNATURE		DATE	July 14, 2000

APPLICATION FOR
UNITED STATES LETTERS PATENT
SPECIFICATION

Inventor(s):

Shoji Hayashida

Title of the Invention:

An Electronic Cashless System

An Electronic Cashless System

Background of the Invention

This invention relates to an electronic cashless system for cashless commercial transactions.

5 The following three transaction forms are mainly used to enable cashless commercial transactions.

(1) A transaction with a credit card

When the customer makes a purchase, he shows a credit card issued by a bank for payment to a seller.
10 Normally, the seller asks the issuer for an authorization to accept the credit card. If the acceptance is authorized, the purchase transaction with the credit card is executed. The seller then asks the credit card company for payment. The
15 credit card company has banks related to the commercial transaction prepaid the sales amount from the customer's account and credit it to the seller's account.

(2) A transaction with a bank ATM card

20 When the customer makes a purchase, he shows the seller a bank ATM (automatic teller machine) card intended for depositing and withdrawing cash from an ATM. The seller asks the customer's bank for payment through a POS terminal that can directly log
25 onto the bank's deposit ledger files at the point of

sale. The bank immediately transfers the amount from the customer's account to the seller's account.

(3) A transaction with a prepaid card

5 The customer makes a prior cash purchase of a prepaid card from a seller or an automatic vending machine. After the customer inserts the prepaid card into the automatic vending machine and follows the necessary instructions, goods or services are provided and the appropriate amount is deducted from
10 the prepaid card.

These three methods each have their disadvantages as follows.

(1) A transaction with a credit card

15 A. The seller has to ask the issuer for an authorization to accept the credit card and is required to do additional paperwork for creating invoices. Therefore, the use of credit cards is limited to purchases at retail outlets of higher priced goods and higher value-added goods.

20 B. To avoid a doubtful account or a situation, where not sufficient funds were deposited at the time of purchase, a credit card is issued only to the customers who pass a certain test.

(2) A transaction with a bank ATM card

25 A. The transfer of the amount from the customer's

5

10

(3) A transaction with a prepaid card

15

B. If a customer is asked to buy a prepaid card far in advance of his planned purchase of necessary goods and services, his current liquidity is reduced.

20

25

Summary of the Invention

An object of the present invention is to provide completely cashless commercial transactions. .

A feature of the present invention resides in an
5 electronic cashless system comprising a cashless
medium or electronic money for memorizing amount
information, and for performing an operation of amount
information, an automatic transaction terminal device
having a reading/writing means for writing amount
10 information to the cashless medium, a center device
having a deposit ledger file, connected with the
automatic transaction terminal device, means for
identifying the account balance of multiple accounts
and for storing amount information and at least a non-
15 settled fund file means for storing amount information
written by the cashless medium and a seller ledger
file means for identifying the account balance of the
multiple seller's accounts and for storing amount
information.

20 Brief description of the drawings.

Figure 1 shows the configuration of the underlying principle,

Figure 2 shows the preferred embodiment of the cashless medium,

25 Figure 3 shows the preferred embodiment of a bank

center device,

Figure 4 shows the preferred embodiment of an ATM (automatic teller machine) terminal unit,

Figure 5 shows the preferred embodiment of a POS (point of sales) terminal unit,

Figure 6 shows the basic processing flow of a multi-function IC card,

Figures 7A through 7D show the processing flow for a multi-function IC card,

Figure 8 shows the processing flow for an ATM terminal unit,

Figure 9 shows the processing flow for a read-only terminal unit,

Figures 10A and 10B show the processing flow of a bank center unit,

Figure 11 shows the amount replenishment flow to a card,

Figure 12 shows the processing flow of a purchase with a card, and

Figure 13 shows the processing flow for depositing a seller's sales amount to a bank.

Description of the Preferred Embodiments

Following is a detailed explanation of this invention.

Figure 1 shows the configuration of the

underlying principle. This configuration comprises a cashless medium 1 having memory means 11 for memorizing amount information, and an operation means 12; an ATM terminal unit 2 having a read/write means 2-1 for writing amount information into the cashless medium 1; a deposit ledger file 321 for storing amount information that identifies the deposit balance corresponding to one of many accounts; a non-settled fund file 322 for storing amount information written at least in the cashless medium 1; a bank center device 3 comprising a seller ledger file 323 for storing amount information that identifies the deposit balance corresponding to the account of the seller and a medium balance log file 324 for memorizing balance of the cashless medium 1 when the ATM terminal unit 2 writes the most recent amount information to the cashless medium 1; and a commercial transaction or POS terminal device 4 having a register unit 51 to which amount information is input, a sending/receiving part 41 for at least sending and receiving amount information to and from said cashless medium 1, and a sales tallying file 53 for tallying and storing amount information gained from said cashless medium 1, and that is at least connected with the bank center device 3.

The ATM terminal unit 2, at an issuing time of the cashless medium 1, writes into the memory part 11 any designated amount information not exceeding the upper limit of the amount information stored in the deposit ledger file 321 of the bank center device 3. The owner of the cashless medium 1 carries it with him to a seller. The owner presents this cashless medium 1 at a clearing time. An operator at a retail outlet operates the register unit 51 of the commercial transaction or POS terminal device 4 and inputs amount information necessary to clear the commercial transaction. The sending/receiving part 41 of the commercial transaction or POS terminal device 4 sends inputted amount information necessary to clear the commercial i.e. the amount of goods and services changing hands. The operation means 12 of the cashless medium 1 makes an operation processing based on the amount information received from the commercial transaction or POS terminal device 4 and the amount information memorized in the memory means 11. In short, the operation means 12 performs the an operation of subtracting the amount indicated by the amount information received from the commercial

transaction or POS terminal device 4 from the amount indicated by the amount information stored in the memory means 11. After this operation, if amount information in excess of the amount necessary for clearing the commercial transaction is stored in the memory means 11 of the cashless medium 1, the cashless medium 1 notifies such an occurrence to the commercial transaction or POS terminal device 4. After this notification, the commercial transaction or POS terminal device 4 sends the information that the commercial transaction has taken place to the cashless medium 1 and stores the same amount information in the sales tallying file 53 classified by the clearing bank. These actions conclude a direct clearing of the commercial transaction with the owner of the cashless medium 1.

Next, an indirect clearing of the commercial transaction is made, i.e. a clearing with the bank center device 3. First, amount information stored in the sales tallying file 53 is sent to the bank center device 3 of the proper clearing bank. Based on the amount information sent, the bank center device 3 prepaids the necessary amount to the non-settled fund file 322 and credits the same to the appropriate account of the seller in the seller ledger file 323.

Since a transaction is thus consummated in the above manner. This invention thus enables a complete cashless commercial transaction.

Meanwhile, when amount information memorized in the memory means 11 of the cashless medium 1 is rewritten, the cashless medium 1 is confirmed of its validity first by being connected to the ATM terminal unit 2. This could be done, for instance, by a password. After amount information inputted by the owner, such as that pertaining to the increase in the authorized amount, is sent to the bank center device 3, the bank center device 3 reads out information from the deposit ledger file 321 of the cashless medium 1 and stores the information in the deposit ledger file 321 after revising it. It also settles the non-settled funds stored in the non-settled fund file 322 and stores the balance in the medium balance log file 324. After this storing operation, the bank center device 3 sends a termination notice to the ATM terminal unit 2, which updates the balance memorized by the memory means 11 of the cashless medium 1 so that a new balance is certain (usable). This revision can be done by the inputted amount immediately after the validity of the cashless medium 1 is confirmed and fixed after the termination notice

from bank center device 3. The above actions enable a complete cashless commercial transaction by making the clearing cashless and by deducting the amount at settlement time.

5 The following is the description of each device.

(1) Cashless medium (Refer to Figure 2.)

It is a substitute for an existing bank ATM card (magnetic stripe card). Its functions are technologically extended and its purpose is expanded.

10 It is a multi-function IC card containing an electronic brain (a memory part and an operation and processing part).

The multi-function IC card 21, a cashless medium, contains an operation control part 211, an amount information memory part 212, a keyword memory part 213 and a battery 214, and has display part 215 (for instance a liquid crystal display), input keys 216 (a function key and a numeric key) and a contact part 217 (an interface with an ATM terminal unit) on
20 its an external surface.

Next, the actions of the cashless medium are explained by referring to Figures 7A through 7D.

First, a customer who wants to make an electronic cashless commercial transaction must have amount
25 information for a shopping process written on a multi-

0964699-074400

function IC card 21, appropriately issued by a valid issuer. This amount in the amount information can be designated arbitrarily as any amount not exceeding the limit set between the customer and the issuer of the multi-function IC card as cashless medium 1.

The amount information needs to be memorized in the amount information memory part 212 of the multi-function IC card 21. If the customer knows the balance in the amount information memory party 212 of the multi-function IC card 21, he can make an appropriate replenishing action as to how much amount is necessary to be replenished.

The customer turns on the power of the multi-function IC card 21 with its input keys 216. When the power of the multi-function IC card 21 is turned on, as shown in Figure 7A, the multi-function IC card 21 indicates a "power-on" status at the display part 215, for example by showing a numeric digit "0" by a setting of a "power-on" status (step 611). At this time, if the card is already unusable, an unusable status is detected by a card usage failure status determination (step 621). The multi-function IC card 21 notifies the owner that the card is unusable by indicating an "X" sign at a sign digit of the card's display part 215, for example, and turns off

its own power through a termination processing -(step 622).

When a card usage failure determination (step 621) judges "NO", i.e. the card being NOT unusable, the multi-function IC card 21 makes a validity check of the card use by a personal identification code individually registered by each owner (step 613). This personal identification code, which is registered when the card is issued, can be chosen to be unnecessary to suit the owner's convenience.

If the multi-function IC card 21 detects no registering of a personal identification code in any personal identification code determination (step 613), for counting the number of wrong personal identification code inputs by the owner, a personal identification code mismatch counter is initialized (cleared) to standby for a personal identification code input. Next, the multi-function IC card 21 becomes ready for an input of a personal identification code (step 615) by the owner. When the owner inputs his personal identification code with input keys 216, the multi-function IC card 21 detects the input through personal identification code determination (step 616), and a judgment is made as to whether an inputted personal identification code

09E4E9E9 "074400

matches a registered personal identification code at
step 617. If the former mismatches the latter, the
value of the input counter of a personal
identification code mismatch is increased by one, and
5 whether or not the number of mismatches exceeds a
limit is judged in step 619. If it does not, an
indication of a personal identification code mismatch
is given to the owner by a display part 215 in step
623, for instance with an indication of an "E" at a
10 numeric digit, and the multi-function IC card 21 waits
for a new input of a personal identification code in
step 615. If the number of mismatches is judged to
exceed the limit number by a limit judgment (step
619), the multi-function IC card 21 registers a card
15 usage failure status in its internal memory part in
step 620, for instance with an invalid card flag
within the keyword memory part 213. After this
status is registered, it becomes impossible for the
owner to clear it. Next, multi-function IC card 21
20 notifies the owner, who is the card user, that the
card is in a card usage failure status, e.g. by
indicating an "X" sign in a code digit in display part
215. Thereafter, multi-function IC card 21 stops
its own processing by turning off its power according
25 to a termination processing (step 622). If the

wrong personal identification code is inputted several times, the holder is not deemed to be the authorized owner of the multi-function IC card 21. Thus, once a limited number by which the personal
5 identification code is input is exceeded, the card usage failure status is maintained, even if the power of the card is turned on. Thus, an unauthorized holder is prevented from abusing the card.

If the multi-function IC card 21 identifies a
10 match (YES) of a personal identification code inputted by the holder and one memorized internally in step 617 or no personal identification code is registered (judged YES in step 63), the following processings are made. As shown in Figure 7B (wherein [A], [B], [C],
15 [Y], [Z], [A1], [B1] and [B2] are terminals that show the processing flow), by an indication processing of a card usage ready status (step 631) in display part 215, the multi-function IC card 21 notifies the owner that the card is in a usable state, for instance by
20 showing a double circle in the code digit. The multi-function IC card 21 is thus put in an activated state and stands by for an input or a receipt detection (step 632). Thereafter, the owner of the card can confirm the card's remaining balance or
25 check a detail of the prepaids and credits as a local

card processing, shop at a retailing outlet, or increase or decrease the amount stored in the card by transferring funds respectively from or to the other deposit accounts with an ATM terminal unit. Next,

5 to detect the arrival of these demands (step 633), the multi-function IC card 21 judges a time-over, a power key input, a confirmation key input, and a communication with an ATM terminal unit in steps 634, 635, 636 and 637 respectively.

10 When the card is left without further instruction after being put in a ready status, such a condition is detected (YES) by a time-over determination (step 633), and the card stops its actions after performing a termination process 622.

15 A power key set in the card's input keys 216 turns the card's power on and off. If an owner leaves the power on after making necessary processings by activating the card, the card's battery 214 is exhausted unnecessarily. To prevent such battery
20 exhaustion, like an automatic power shut down function of an electronic calculator, the multi-function IC card 21 automatically turns its own power off, if time-over determination step 633 does not detect any input or communication over a certain period of time.

25 When an amount replenishment is made for multi-

function IC card 21, multi-function IC card 21 detects (YES) that a communication with the ATM terminal unit 2 will be made, when the card is inserted into the ATM terminal unit 2 in step 636 and begins a communication
5 with the ATM terminal unit 2 via a contact part 217 of the multi-function IC card 21.

As shown in Figure 7D, the multi-function IC card 21 first notifies the keyword and the bank number stored in its own keyword memory part 213 to ATM
10 terminal unit 2 for mutual verification (step 671), and stands by for a processing kind. Inputting a replenishing amount, the owner operates ATM terminal unit 2 for transferring the amount from his deposit account to the multi-function IC card 21 in its amount
15 information memory part 212. Then, the multi-function IC card 21 stands by to receive the processing kind (step 672) from the ATM terminal unit 2. If the processing kind is judged (YES) as a replenishment processing (step 673), the multi-
20 function IC card 21 stands by to receive information about the replenishing amount and the replenishment date from ATM terminal unit 2 (step 674). After receiving the information, the replenishing amount contained in the information received from the ATM
25 terminal unit 2 and the remaining balance memorized in

0044T20" 0202T960

the amount information memory part 212 within the card are added together to produce a new balance (step 675). This addition is executed in the operation control part 211. Then the information about the new balance is stored in the amount information memory part 212 within the card by a processing of revising amount information memory (step 676). Thus the replenishment of the amount specified by the owner from his bank account to amount information memory part 212 within the card is concluded. This new balance is sent to the ATM terminal unit 2 to be memorized by a center processing unit (step 677). Next, as a record for executing amount replenishment transactions, the replenishing amount and date are memorized in the transaction detail memory part of the multi-function IC card 21 (step 678). This memory is stored according to an LIFO (Last-In, First-Out) method, so that the owner can confirm transactions starting with the most recent one.

When all the revision processes by the operation control part 211 within the multi-function IC card 21 are finished, the replenishing amount is displayed on the display part 215 in replenishing amount display processing (step 679). Next, the information that the replenishment processing within

Meanwhile, when the owner deposits at least a part of the card's balance to his deposit account, the multi-function IC card 21, after standing by to receive a processing from the ATM terminal unit 2, detects that it is not a replenishment processing (NO). Then, multi-function IC card 21 judges whether it is a depositing processing in a judgment processing (step 684). If the processing kind is undefined (NO), the multi-function IC card 21 notifies the ATM terminal unit of the transaction kind error (step 689) and reverts to displaying a card-usage-ready status (step 631). When the owner transfers a part of the amount stored in the multi-function IC card 21 back to the deposit account, the multi-

function IC card 21 stands by to receive the information on the transferred amount and the transaction date from the ATM terminal unit 2 in the receiving-ready processing (step 685), and when the receipt of the information is consummated, a stored amount deficiency judgment processing (step 686) compares the transferred amount and the stored balance in the amount information memory part 212. If the redepositing amount is greater, a not-sufficient-fund judgment (NO) is made, and the ATM terminal unit 2 is notified of the not sufficient fund balance in step 688. Then, control is handed over to the card-usage-ready status display step 631, and the multi-function IC card 21 stands by for a subsequent input.

When the stored balance is greater than the redepositing amount, a redepositing processing becomes possible, and the balance of the stored amount is reduced by the redepositing amount in a reduction processing (step 687). Then, a processing similar to a balance information revising processing (step 676) of a replenishment processing is performed, so that the balance information memory in amount information memory part 212 is revised. That is, the ATM terminal unit 2 is notified of the new reduced balance to be memorized in a medium balance log file

34 of the bank center device 3. After the multi-function IC card 21 memorizes the redepositing amount and the transaction date in transaction detail memory processing (step 678), the display part 215 of the multi-function IC card 21 shows the redepositing amount with a negative sign, for instance, so that the owner can confirm the transferring amount by viewing the display part 215. Then, the multi-function IC card 21 notifies the ATM terminal unit 2 of the processing consummation in a sending processing (step 680), and stands by for a power key input starting from step 681 or a power-off instruction for an elapsed time over a predetermined period by a time-over judgment step. Because there is some time before the power is turned off, the owner can confirm the processing result of the transaction with the ATM terminal unit 2 by looking at the display part 215. Besides, even if the owner forgets to turn the power off, it is turned off automatically after a predetermined time has elapsed. Thus, the battery 214 is prevented from being exhausted unnecessarily and his privacy is protected by eliminating the possibility of the display part 215 being seen by others.

When the owner inquires about the stored balance,

the date and amount of past purchases, the date and amount of a replenishment or a transfer back to his deposit account, the multi-function IC card 21 can display the balance and transaction details memorized
5 in the amount information memory part 212 on the display part 215. In this case, after the owner puts the multi-function IC card 21 in a card-usage-ready status by activating the card, he operates the inquiry key of the input keys 216. The card is in
10 an activated status and the multi-function IC card 21 detects this by an inquiry key detecting processing (step 635). The processing status of this inquiry key becomes a card's local processing of the multi-function IC card 21 independently.

15 As shown in Figure 7C, the multi-function IC card 21 reads out the balance from the amount information memory part 212 of the card by a stored balance read out processing (step 651) with an inquiry key detection and displays the stored balance in the
20 display part 215 by a display processing (step 652). The multi-function IC card 21 stands by for the next key input (step 653), while the balance is displayed. If the owner leaves the card alone with the balance displayed, a time-over is detected after an elapse of
25 a predetermined time, control is handed over to a

consummation processing (step 622), and the power is turned off for a consummation.

Meanwhile, if the owner further hits the inquiry key when the card is in a balance displaying mode, the hitting is detected by an inquiry key input detection processing (step 655), and the multi-function IC card 21 reads out the most recent of the dates recorded in the date of the transaction detail memory part and displays the date information on the display part 215 by a display processing (step 657). After the date information is displayed, the multi-function IC card 21 stands by for the next key input in a key input stand-by processing (step 658). If the owner leaves the multi-function IC card 21 alone, a time-over is detected (step 659) and the processings are consummated. If the inquiry key is further hit, the inquiry key detection processing (step 660) detects the input, so that the most recent piece of amount information of the transaction date is read from the transaction detail memory part in step 661. The amount information is then displayed on the display part 215 by a display processing (step 662); e.g. a number with a positive sign is displayed if the transaction is an amount replenishment. From the inquiry key input detecting processing (step 653)

after the stored balance inquiry step to amount
information processing (step 662), as long as an
inquiry key hitting is detected, the transaction date
and the transaction amount are displayed alternately
5 in counter-chronological order. After all pieces
of transaction detail are displayed, the most recent
piece of information on transaction detail is
displayed. The data stored in the transaction
detail memory part is displayed repeatedly in
10 counter-chronological order, until control is handed
over to a control by either a consummation processing
(step 622) that turns off the power by detecting a
hitting of a power key of the input keys 216 or a
card-usage-ready status processing (step 631), for
15 instance, pursuant to a zero key detection processing
(step 664).

The owner can confirm the stored balance by this
balance inquiry. If necessary, he can decide
whether to replenish an amount to the card or transfer
20 an amount to his deposit account. By checking the
transaction detail, he can determine when and how
many of purchases, replenishments or redepositings
were made. The processings can be consummated with
a power key at any point, or a card-usage-ready status
25 can be created with a numeric key so that a processing

00405369.0400

can be executed.

Purchase

When an owner makes a purchase with the multi-function IC card 21 after he puts it in a card-usage-ready status, he inserts it into the seller's POS terminal device, which is a card reading terminal. The card is inserted into the card reading/writing part 521 of Figure 5A, so that it can communicate bi-directionally with the card contacting part 217.

As shown in Figure 7B, after a series of judgment steps of a card-usage-ready status display processing (step 631) of the multi-function IC card 21, the multi-function IC card 21 detects that it is inserted into the card's reading/writing part 521 of a card reading/writing unit 52, by a receipt at the card's contacting part 217 of a signal from a POS terminal device (YES in step 637). Next, to confirm that the POS terminal device is a valid reading terminal, the multi-function IC card 21 reads out the stored keyword and bank number from the keyword memory part 213 and notifies the POS terminal device, which is a reading terminal. Then, the multi-function IC card 21 stands by to receive the information on the amount and the date of the owner's purchase from the reading terminal in a receiving consummation judgment processing (step 639). The information on the

amount and date of a purchase is inputted by a POS
registering unit 51 of the POS terminal device, which
is a reading terminal, and sent to the card. When
the multi-function IC card 21 detects a consummation
5 of receiving the information, it reads out the stored
balance from the amount information memory part 212 in
a balance deficiency judgment processing (step 640) to
compare it with the purchase amount. Since a
payment is possible if the stored amount is greater
10 than or equal to the purchase amount, the multi-
function IC card 21 reduces the purchase amount from
the stored balance and revises the data of the amount
information memory part 212 as the new stored balance.
In a transaction detail memory processing (step 642),
15 the multi-function IC card 21 memorizes the data on
the amount and date of the purchase as an additional
transaction detail memory of the amount information
memory part 212. This additional memory is stored
in a predetermined memory area, so that a read-out in
20 counter-chronological order in response to an inquiry
of the stored balance and transaction detail can be
performed.

Next, the multi-function IC card 21 displays the
purchase amount in its display part 215 pursuant to an
25 amount display processing (step 643). The multi-

function IC card 21 notifies the POS terminal device 4 of the processing consummation of the purchase by sending a processing consummation signal to the POS terminal device (step 644) with this display on. A
5 mutual verification based on what is displayed enables the owner to confirm the purchase amount with the amount actually paid by the card, when he receives the card returned from the insertion to the POS terminal.

Meanwhile, if a balance is found to be not
10 sufficient for the purchase amount in a stored balance judgment processing (step 640), the information that the stored balance is not sufficient is sent to the POS terminal in step 645. The POS terminal device 4 that receives this information notifies this condition
15 to the POS terminal device operator and advises him to forego the commercial transaction, change the amount paid with the card or use other method of commercial transaction. This helps the seller to handle a customer flexibly.

20 After these processings are completed, the multi-function IC card 21 changes the control to stand by for a detection of a next input intervention (step 632), and stands by until a key input or a receiving of a signal from the POS terminal device 4 is
25 detected. In the mean time, if no detection is made

for a predetermined time period, a time-over is detected in the time-over judgment (step 633) and the power is turned off.

(2) ATM terminal unit 2 (Refer to Figure 3.)

5 Ordinarily, an ATM terminal unit 2 is connected with a bank center device 3 and is and equipped with a medium card reading/writing part 411, a medium card control part 412, an input operation control part 413, an operation processing part 410 and a line
10 controlling unit 414.

The ATM terminal unit 2 writes the information about the amount the owner transfers between his bank deposit account and the multi-function IC card 21 i.e. the cashless medium 1.

15 The following is an explanation of the actions shown in Figure 8.

The owner inputs the valid personal identification code of the card by turning on the power of the multi-function IC card 21. After
20 confirming the card-usage-ready status, he makes a selection input of a transaction kind to an ATM terminal unit 2. At this time, the ATM terminal unit 2 instructs the owner to select a transaction kind in a transaction selection screen display
25 processing (step 711) by having him make a selection

of input of a transaction kind. The owner makes the selection input of a transaction kind by following this instruction. After detecting an input in a condition of standing by for the detection of a selection input (step 712), the ATM terminal unit 2 reads the transaction kind selected by the input operation control part 413 (step 713). Here, the ATM terminal unit 2 displays an instruction to insert the multi-function IC card 21 and stands by until a card insertion to the card reading/writing part 411 is detected. The detection of the card insertion triggers a communication between the ATM terminal unit 2 and the multi-function IC card 21, and the ATM terminal unit 2 receives the information on the card's keyword and bank number (step 716). Using these data, a validity check of the multi-function IC card 21 is performed (step 717). If it is judged to be invalid (NO), the ATM terminal unit 2 displays an invalid card insertion by a display step 721 and concludes its processing by ejecting the card (step 720). If it is judged to be valid (YES), the ATM terminal unit 2 reads the bank deposit account number from the multi-function IC card 21 (step 718). The ATM terminal unit 2 judges whether the transaction kind is an amount replenishment by a judgment

processing (step 731) that judges the transaction kind
inputted by an owner. If the transaction kind is an
amount replenishment (YES), the ATM terminal unit 2
displays an instruction to input the personal
5 identification code of the account (step 732), and
stands by for an input of the personal identification
code (step 733). When the personal identification
code is inputted, the ATM terminal unit 2 sends the
transaction kind, the deposit account number and
10 personal identification code to the bank center device
3 using a line controlling unit (step 734) and asks
for a validity check. The ATM terminal unit 2
stands by for the check processing by the bank center
device 3 (step 735), and judges whether the check
15 result is normal or not. If the ATM terminal unit 2
judges the personal identification code to be invalid,
the invalidity of the personal identification code
input is displayed to the owner (step 746) and
terminates its processings after ejecting the cashless
20 medium 1. If the ATM terminal unit 2 judges the
personal identification code to be valid, the ATM
terminal unit 2 instructs the owner to input the
amount he wants to replenish to the cashless medium 1
(step 737). After detecting the amount input
25 consummation in an amount input detection processing

If the transaction kind is judged not (NO) to be an amount replenishment (step 731), the ATM terminal unit 2 judges whether the transaction kind is a redepositing in a redepositing judgment processing (step 751). If the transaction kind is not a redepositing, the ATM terminal unit 2 executes other processings according to the particular transaction kind and consummates its processings (step 761).

Redepositing is defined as the owner depositing at least a part of the balance stored in the multi-function IC card 21 back to his deposit account. It means that the multi-function IC card 21 transfers a part of the amount stored in the multi-function IC

card 21 back to the deposit account via the bank center device 3.

If the transaction kind is judged (YES) to be a redepositing, the ATM terminal unit 2 sends the transaction kind and the deposit account number to the bank center device 3 and asks for a validity check (step 752). The ATM terminal unit 2 stands by for the processing consummation at the bank center device 3 (step 753), and instructs the owner to input the redepositing amount (step 754). When the ATM terminal unit 2 detects the input amount (step 755), the ATM terminal unit 2 notifies the multi-function IC card 21 of the redepositing amount (step 756). The ATM terminal unit 2 then stands by for a consummation of the stored balance subtraction processing within the multi-function IC card 21 (step 757), and judges whether the processing within the multi-function IC card 21 is properly consummated (step 758). If the stored balance is less than the redepositing amount, redepositing cannot be performed, and the multi-function IC card 21 sends the balance deficiency. The ATM terminal unit 2 notifies the owner who operates the ATM terminal unit 2 by displaying the result (step 762). If the intra-card processing is properly consummated, a redepositing from the multi-function IC

card 21 becomes possible, and the ATM terminal unit 2 receives the new balance stored in the multi-function IC card 21 (step 759), and notifies the redepositing amount and the new balance stored in the card to the bank center device 3. The ATM terminal unit 2 stands by for the consummation of the deposit account revising stand by processing at the bank center device 3 (step 719), and after ejecting the multi-function IC card 21 (step 720), the ATM terminal unit 2 consummates its processing. Thus, the ATM terminal unit 2 can subtract the redepositing amount specified by the owner from the amount stored in the card and redeposit it to the deposit account of the bank center device 3.

(3) A POS terminal device (Refer to Figures 5A and 5B.)

A card reading/writing unit 52 is added to an ordinary seller POS register unit 51 for merchandise sales management.

The card reading/writing unit 52 comprises a card reading/writing part 521 for controlling their reading and writing, a sales tallying file 53, a card control part 522, a sales tallying file control part 524, an operation processing part 520 and a line controlling unit 525.

The sales tallying file 53 stores a transaction number total 532 and an amount total 533 tallied by a billed bank number 531, as well as a grand total 534.

The following is a explanation of an action of a
5 POS terminal device, -shown in Figure 9.

When an owner shops at a seller with the cashless medium 1, the card reading/writing unit 52 of the POS register unit 51 shown in Figure 5A becomes a reading terminal unit of the multi-function IC card 21. The
10 POS register unit 51 performs a shopping check-out processing by a seller. If a commercial transaction is with the multi-function IC card 21, the POS register unit 51 and the card reading/writing unit 52 perform a sales processing by communicating with each
15 other. The POS terminal device performs its processing, when the multi-function IC card 21 is inserted into the card reading/writing unit 52. There are three kinds of the multi-function IC card 21. A shopping card for making a purchase,
20 discussed previously, a maintenance card for maintaining the card reading/writing unit 52, and a settlement card for settling a sales tallying file that stores amount data within the card reading/writing unit 52 by a sales processing. The
25 card inserted by a customer is limited to the shopping

card among the above three kinds.

A customer inserts his card into the card reading/writing part 521 of the card reading/writing unit 52 to clear his shopping.

5 A POS terminal device stands by for a detection of an insertion of the multi-function IC card 21 (step 811). If a card insertion is detected, the POS terminal device judges in a card kind judgment processing (step 812) whether the inserted card is a
10 shopping card. If the POS terminal device judges that the inserted card is in fact a shopping card (YES), the POS terminal device receives from the multi-function IC card 21 the keyword and bank number stored respectively in the keyword memory part 213 and the
15 amount information memory part 212 (step 813). The POS terminal device then performs a validity check of the card (step 814). If it judges it to be invalid (NO), the POS terminal device sends the keyword mismatch to the POS register unit 51 in a mismatch
20 notice processing (step 827), and ejects the card in a card ejecting processing (step 823) and consummates its processing. If the POS terminal device judges that the inserted card is valid (YES), the POS terminal device sends the information that the card is
25 accepted by a POS register notice processing (step

815) to the POS register unit 51. After this status, normal card sales processings are executed.

First, after confirming a receipt consummation of a card acceptance notice sent to the POS register unit 51 (step 816), the POS terminal device receives the information on the purchase amount from the POS register unit 51 (step 817). At this time, the POS terminal device simultaneously receives the date as well as the amount of the commercial transaction from the POS register unit 51. The information on the amount and the date of the commercial transaction is sent to the multi-function IC card 21 in a card sending processing (step 818). The POS terminal device stands by for a consummation of the intra-card purchase processing (step 819). When the POS terminal device receives the consummation of the purchase processing within the multi-function IC card 21 by a card processing judgment processing (step 820), the POS terminal device revises the sales tallying file 53 in a file revising processing (step 821), using the data of the keyword and bank number already received from the card and the data of the amount and date of the commercial transaction as the revision data. The revision is executed by adding the number and amount of the commercial transaction

5

10

20

25

the card kind judgment transaction (step 825) to be a settlement card, the POS terminal device performs a closing processing of the sales tallying file 53 in a settlement card processing (step 830). The closing processing is performed in preparation for sending the sales tallying file 53 to the bank center device 3 shown in Figure 1. If any of the sales tallying data is closed, it will be re-added as one sales tallying file. The communication to the bank center device 3 is performed directly by a communication line controlled primarily by the bank center device 3 or by a transmission system to it on a side connected with the POS register unit 51. The content of the communication to the bank center device 3 or the transmission system comprises a datum part codified in a manner predetermined by the bank center device 3 and an ordinary text datum part "as is" of the sales tallying file 53. The codification is meant to be for security protection of the data in the sales tallying file 53, while they are being sent to the bank center device 3. (The sending processing to the bank center device 3 is not shown in the drawings.)

(3) The bank center device 3 (Refer to Figure 4.)

The bank center device 3 comprises the following

files: a deposit ledger file 321, a non-settled fund
file 322, a seller ledger file 323 (for a seller's
account) and a medium balance log file 324. It also
comprises an operation processing part 31 (which
5 includes a deposit ledger file control part 311, a
non-settled fund file control part 312, a seller
ledger file control part, a medium balance log file
control part 314 and an operation control part 310)
that controls reading and writing of each of the above
10 files, and a line controlling unit 33.

The following is an explanation of the bank
center device 3, by referring to Figures 10A and 10B.

The bank center device 3, as shown in Figure 3,
performs on-line real-time processing actions, such as
15 moving funds between the deposit ledger file 321 and
the non-settled fund file 322 and logging the stored
balance, when the card's owner replenishes the multi-
function IC card 21 or redeposits a part of the amount
stored in the multi-function IC card 21. It also
20 performs batch processing actions, such as making a
fund settlement between the non-settled fund file 322
and the seller ledger file 323 by up-loading the sales
tallying file 53 in the POS terminal device.

As shown in Figure 10A, in the on-line real-time
25 processing with the ATM terminal unit 2, after the

customer begins a processing at the ATM terminal unit
2, the bank center device 3 receives the transaction
kind, the account number for identifying the deposit
ledger file 321 and the personal identification code
5 of the account from the ATM terminal unit 2 (step
911). Then, the bank center device 3 reads the
content of the deposit ledger 321 (step 912). When
the bank center device 3 detects a replenishment
processing in a transaction kind judgment processing
10 (step 921), the bank center device 3 judges whether
the personal identification code inputted by the
customer matches that memorized in the deposit ledger
file 321 in a judging step 922. If the bank center
device 3 detects a mismatch, it sends the information
15 about the mismatch of the personal identification code
to the ATM terminal unit 2 (step 933), rejects a fund
withdrawal from the deposit ledger file 321 and
consummates the processing. If the bank center
device 3 detects a match, it stands by to receive a
20 data about the amount the customer inputs from the ATM
terminal unit 2 (step 924). The receiving amount
data is the data of the amount replenished to the
cashless medium 1. The amount is subtracted from the
customer's account in the deposit ledger file 321 and
25 added to the non-settled fund file 322. On receiving

09E4E9E9 071400

the amount data, the bank center device 3 compares the amount with the customer's account balance memorized in the deposit ledger file 321 in a judging processing (step 925). If the account balance is less than the replenishing amount, the bank center device 3 sends an account balance deficiency to the ATM terminal unit 2 (step 932) and consummates the processing. If a sufficient account balance is found, the bank center device 3 sends to the ATM terminal unit 2 that its processings are consummated normally (step 926). The ATM terminal unit 2 stands by to receive an information on a new stored balance that the bank center device 3 sends after the normal processing consummation notice (step 927). This new stored balance is the amount sent back from the ATM terminal unit 2 after the replenishing amount and the current stored balance are added together within the cashless medium 1. After the receiving is consummated, the bank center device 3 revises the deposit ledger file 321 by subtracting the replenishing amount from the customer's account balance memorized in the deposit ledger file 321 by a revising processing (step 928). Next, the bank center device 3 revises the non-settled fund file 322 by adding the replenishing amount to the balance of the non-settled fund file 322. When the file

revision is consummated, the bank center device 3 stores a record by writing the new stored balance of the cashless medium 1 received in a log storage processing (step 930) into the medium balance log file 324. Then, the bank center device 3 notices the ATM terminal unit 2 that it has consummated its processings in a sending processing (step 931).

If the bank center device 3 finds that the transaction kind from the ATM terminal unit 2 is a redepositing in a transaction kind judging processing (step 941), the bank center device 3 sends a processing continuation to the ATM terminal unit 2 (step 942). The bank center device 3 stands by to receive the data on the redepositing amount and the new stored balance of the cashless medium 1 from the ATM terminal unit 2 (step 943). On receiving the data from the ATM terminal unit 2, the bank center device 3 revises the deposit ledger file 321 by adding the redepositing amount data to the customer's account balance 321 in an adding processing (step 944). Then, the bank center device 3 revises the non-settled fund file 322 by subtracting the redepositing amount from the balance of the non-settled fund file 322 in a subtracting processing (step 945). Thus, the bank center device 3 enables a customer to redeposit the

amount from the cashless medium 1 to his deposit account. The cashless medium 1 hands control over to a processing of logging the cashless medium 1 (step 930) and notifies the ATM terminal unit 2 that the
5 bank center device 3 has consummated its processings by a consummating processing (step 931).

If the bank center device 3 finds a transaction from the ATM terminal unit 2 to be neither a replenishing processing nor a redepositing in the
10 transaction kind judging, the transaction is processed as another transaction the bank center device 3 performs in step 946.

A seller can make a fund settlement of the seller ledger file 323 by billing the amount stored in the
15 sales tallying file 53 within the POS terminal device to a bank. The bank center device 3 receives the data of the sales tallying file 53 from the POS terminal device (step 951), as shown in Figure 10B. On consummating the data receipt, the bank center
20 device 3 notifies the POS terminal device of the data receipt consummation (step 952), and moves to a decoding processing of the received data (step 953). The codified part is the codification of the sales tallying file 53, and its content becomes the same as
25 a simultaneously sent ordinary text part of the sales

tallying file 53 when it is decoded. To confirm it,
the bank center device 3 performs a matching check of
the decoded result of the codified part and the
ordinary text part in a validity judgment processing
5 (step 955). If an unmatched datum is found, the
sent sales tallying file 53 is not deemed to be valid,
and the bank center device 3 performs an extraordinary
processing (step 950). The bank center device 3
judges that the data sent from the POS terminal device
10 4 are valid only after all of the data are matched.
The bank center device 3 rearranges the data by an
issuing institution in a processing of data sorting
that uses the bank number in the sales tallying file
53 as a key (step 956). The bank center device 3
15 judges the data on the sales tallying file 53 with the
bank number of the bank center device 3 (step 957),
and sorts out the data pertaining to the particular
bank that owns the bank center device 3. The bank
center device 3 deducts the data of the particular
20 bank from the balance of the non-settled fund file 322
in a non-settled fund subtraction processing (step
961) and revises the non-settled fund file 322.
Next, if the bank center device 3 finds the amount
data of the cashless medium 1 issued by another bank
25 in an another bank data judging processing, the bank

center device 3 performs a processing of creating
exchange billing data for the other bank (step 962).
The bank center device 3 revises the processing of
drawing funds to the seller ledger file 323 in a fund
5 drawing processing (step 959), and performs the fund
drawing to the seller ledger file 323 of the seller
that sent the sales tallying file 53, and consummates
the processing.

The following is a description of each unit
10 necessary for an electronic money transaction.

We assume here the use of the multi-function IC
card 21 as the cashless medium 1 for an electronic
purse processing, and the POS terminal device for a
seller's reading/writing terminal unit, and the ATM
15 terminal unit 2 for a bank's reading/writing terminal
unit.

(1) A basic operation of the multi-function IC card
21 (Refer to Figure 6.)

In the initial condition of the multi-function IC
20 card 21 that is issued by a bank to its depositor, the
bank number and the deposit account number of the
issuer are stored in the amount information memory
part 212 and keywords, such as the personal
identification code preregistered by the depositor,
25 are stored in the keyword memory part 213.

If the card is taken out (J1), its power is confirmed to be turned on (J3) by hitting a power key (J2), and the personal identification code is inputted properly (J4). Then the multi-function IC card 21 is
5 in a working condition (J5). When an authorized user wants to confirm the stored amount, such as in a case as of a disbursement from his bank deposit account or immediately before a purchase, he hits a reference key KS (J6) and the current stored balance.
10 is displayed on the display part 215 (J7).

When he further hits the reference key KS (J8), the date of the most recent (i.e. the last) transaction is displayed (J9). When he further hits the reference key KS (J10), the amount of the most
15 recent (i.e. the last) transaction is displayed (J11). When he further hits the reference key KS, the date and amount of the next most recent transaction is displayed in LIFO order. This display can be used as information for a home ledger entry.

20 Since the multi-function IC card 21 has few display digits in the preferred embodiment of this invention, they sequentially display the date and the amount of the transaction with two hittings of the reference key KS. However, if the display digits or
25 rows are increased, a simultaneous display of the date

and amount of more than one transaction become possible, for instance with a single hitting of the reference key KS.

5 The card in a working condition keeps the status of power-on, while it is inserted to the card reading/writing unit 52 or the ATM terminal unit 2, but after it is ejected from them, its power is turned off by an automatic time off function after an elapse of a predetermined time period (J13). When the
10 power is on, the power of the multi-function IC card 21 is turned off at the moment when the power key is hit (J12).

Also, in a status of J7, where the balance is displayed in the display part 215, a hitting of a zero
15 key (J14) puts the card in a shopping processing status. If a power key is hit (J15) or time is out in this status (J7), the card is put in power-off status (J16).

Meanwhile, there are two cases for a wrong input
20 of the personal identification code in a key input status of the personal identification code (J4).

If the limit number of wrong inputs of the personal identification code is exceeded, the card is put in an error status (J17). When time is up or
25 the power key is hit (J18), the card is put in a

power-off status (J19). In the preferred embodiment of this invention, the cashless medium 1 memorizes the change into this status, and the cashless medium 1 displays (J17) on its display part 215 that the card is in an error status and cannot restore its normal status (J3), even if the power key is hit thereafter.

If the limit number of wrong inputs of the personal identification code is not exceeded, the cashless medium 1 displays (J21) an error of a wrong input of the personal identification code, such as "E", on its display part 215. Another key hitting puts the cashless medium 1 in a status of J4 again. Alternatively, if a key is not hit, the card is put into a power-off status (J23) when time is up. In the preferred embodiment of this invention, since the number of wrong inputs of the personal identification code is memorized in its memory means 11, even if the power is turned off and even if the power key is hit again, after time is up (J22), the cashless medium 1 is up into a status (J4), as long as the cashless medium 1 is in a status where the limit number of wrong inputs of the personal identification code is not exceeded.

(2) An amount replenishment to the cashless medium 1 (Refer to Figure 11.)

When the stored amount is replenished from the deposit account with the ATM terminal unit 2, the owner has to put the multi-function IC card 21 in a working status (J5) by the actions so far described.

5 If he inserts it in the ATM terminal unit 2 by performing a predetermined inputting operation, the stored balance is replenished, and the display part 215 displays the amount and it could be substituted for a receipt.

10 After detecting an input to instruct an amount replenishment with a transaction selection key and the card insertion (K2), the ATM terminal unit 2 reads the stored bank number and account number from the card (K3, K4). After verifying its validity, the ATM
15 terminal unit 2 stands by to review the input of the personal identification code and the amount (K5). After a proper input operation is performed, the ATM terminal unit 2 sends the inputted replenishing amount to the card (K6). The card, i.e. the cashless
20 medium 1, calculates the new stored balance by adding this amount to the current stored balance (K7), and sends it to the ATM terminal unit 2 (K8). The ATM terminal unit 2 reads all these data (the bank number, the account number, the personal identification code
25 of the account, the inputted replenishing amount, and

09E4E9E9-0744B0
004F20-696979E9

the new stored balance) (K9) and sends them in a batch to the bank center device 3 (K10).

The bank center device 3 reads the proper deposit account ledger from the deposit ledger file 321 (K11),
5 confirms the personal identification code (K12),
revises the account balance (K13), updates the deposit ledger file 321 (K14), revises the non-settled fund file 322 by adding the inputted replenishing amount (K15), writes the new stored balance to the medium log
10 file 324 (K16), and sends a transaction consummation notice to the ATM terminal unit 2 that all these processings have been consummated (K17).

After receiving the notice, the ATM terminal unit 2 sends a transaction consummation order to the card,
15 i.e. the cashless medium 1 (K18), the cashless medium 1 rewrites the stored balance (K19), stores a transaction record by creating it (K20), displays the replenishing amount to its display part 215 (K21) and consummates all processings. After receiving a
20 notice that the card's processings have been consummated from the card (K21), the ATM terminal unit 2 ejects the card (K22). Thereafter, the cashless medium 1 displays a replenishing amount (K23) in its display part 215, and turns its own power off (K24) by
25 a hitting the power key or by turning off

004403 004403 004403

automatically when time is up. In extraordinary cases discussed earlier such as the mismatch of the personal identification code, the account balance deficiency, the corresponding processings are performed as shown in the flow charts shown later.

A redepositing of an excess stored amount to the deposit account is performed basically in the same manner as the amount replenishment to the cashless medium 1, although the steps are more or less different in the input of the personal identification code and its confirmation.

(3) A shopping with the cashless medium 1 (Refer to Figure 12.)

At a shopping check out time, if an owner of the cashless medium 1, i.e. the multi-function IC card 21, inserts the multi-function IC card 21 in working order into a seller POS terminal device 4, the purchase amount total is deducted from the stored balance. The purchase amount deducted from the multi-function IC card 21 is displayed in the display part 215 of the multi-function IC card 21, which amount can be matched with a shopping receipt received separately.

When the card reading/writing unit 52 detects an insertion of the multi-function IC card 21 in a

working status (M1), it stands by (M2) after reading the bank number and keyword outputted from the multi-function IC card 21 (M3). When a summation key is hit (M4) after all the sales amounts are tallied, the POS register unit 51 computes the sum (M5). Then, after detecting a card insertion (M6), the POS register unit 51 sends the purchase amount to the card reading/writing unit 52 (M7). The card reading/writing unit 52 sends the purchase amount to the multi-function IC card 21 through its card reading/writing part 521 (M8). The multi-function IC card 21 rewrites the stored balance (M10), stores the transaction record by creating it (M11), and displays the deducted amount in its display part 215 (M12). The multi-function IC card 21 then sends the transaction record to the POS terminal device 4 (M13). The card reading/writing unit 52 stores the tallied sum of the sales amount with the multi-function IC card 21 sorted by the issuing bank of the multi-function IC card 21 in the sales tallying file 53 by revising its memory (M14), and notifies the POS register unit 51 of the transaction consummation (M15) and ejects the card (M16). The POS register unit 51 that receives the consummation notice issues a receipt (M18) after making a tally (M17).

5 (4) Depositing of the seller's sales to its bank
(Refer to Figure 13.)

15 The bank center device 3 receives such messages
(N5), decodes them (N6) and classifies them into a
home bank part and a foreign bank part (N7, N10).
The bank center device 3 revises the the non-settled
fund file 322 by deducting the amount in the home bank
20 part (N8) and credit the seller's deposit account by
revising the seller ledger file 323 (N9). The
amount in the foreign bank part is billed to the
appropriate bank through the exchange clearance system
(N11) and credits the seller's deposit account after
25 the non-settled fund file 322 of the appropriate bank

the actual current balances, by the law of large numbers. The estimated current balance is paid out from the non-settled fund file 322, the amount of difference from what the card owner claims is made up
5 for (within the balance of the medium balance log file 324), and the new stored balance is computed by adding these two amounts. This sum is then stored in the amount information memory part 212 of the multi-function IC card 21 that is issued to the owner as a
10 replacement. This difference could ordinarily be an overpayment, the loss of which could be covered by an insurance policy.

Since the deposit data is separated by the bank number into the home bank part and the foreign bank
15 part, the revising of the seller ledger file 323 is applied with the existing settlement method, wherein the home bank part is treated as a cash deposit and can be used immediately, whereas the foreign bank part is treated as a not-yet-cleared-fund deposit and
20 cannot be used immediately.

In this invention's preferred embodiment of the POS terminal device 4 which accommodates the cashless medium 1, i.e. the multi-function IC card 21, the POS register unit 51 is explained. In addition, if
25 vending machines are equipped with a mechanism that

09646959 074400

5

10

15

25

What is claimed is:

1. An electronic cashless system comprising:

a cashless medium means for memorizing amount
information and for performing an operation of amount
5 information;

an automatic transaction terminal device means
having a reading/writing means for writing amount
information to said cashless medium;

a center device having a deposit ledger file
10 connected to said automatic transaction terminal
device,

means for identifying the account balance of
multiple accounts and for storing amount information;

a non-settled fund file means for storing amount
15 information written by said cashless medium; and

a seller ledger file means for identifying the
account balance of the multiple seller's accounts and
for storing amount information.

2. The electronic cashless system according to claim
20 1 further comprising:

a medium balance log file means for memorizing
the stored balance of said cashless medium to which
amount information is written by said automatic
transaction terminal device.

25 3. The electronic cashless system according to claim

09E4E6E9 074400

1, wherein

amount information stored in the memory means of
said cashless medium is returned to said center device
via the automatic transaction terminal device, and

5 said amount information is memorized and stored
within said center device, in a medium balance log
file together with the amount information revised in
deposit ledger log file, and added to the non-settled
fund file for its revision.

10 4. The electronic cashless system according to claim
1 further comprising:

a register part to which a transaction amount is
inputted;

15 an exchange means for at least exchanging amount
information with said cashless medium;

a tallying file means for tallying and storing
amount information obtained from said cashless medium;
and

20 a commercial transaction terminal device
at least connected with said center device.

5. The electronic cashless system according to claim
4, wherein

25 said commercial transaction terminal device sends
via the exchange means amount information necessary
for a commercial transaction to said cashless medium,

0364693-074400

said cashless medium makes an operation with an operation means based on the amount information received from said commercial transaction terminal device and the amount information stored in the cashless medium,

said commercial transaction terminal device revises said tallying file upon receiving information that a transaction can take place.

6. The electronic cashless system according to claim 4, wherein

at least the sum of amount information generated in a commercial transaction is classified by a deposit owner and is stored in the deposit ledger file.

7. The electronic cashless system according to claim 1, wherein

the commercial transaction terminal device sends amount information stored in the tallying file to the center device, and

said center device revises said non-settled fund file and seller ledger file, based on the amount information sent from said commercial transaction terminal device.

8. The electronic cashless system according to claim 1, wherein said cashless medium comprises:

a memory means for storing amount information;

and

an operation means for taking over an externally
supplied transaction amount from said amount
information and storing the result in said memory

5 means.

9. A cashless medium comprising:

a memory means for storing amount information;

and

an operation means for taking over an externally
10 supplied transaction amount from said amount
information and storing the result in said memory
means.

10. The cashless medium according to claim 9 further
comprising:

15 a display means;

a key input means operated by the owner; and

a control means for controlling said display
means so that it displays amount information stored in
said memory means when said key input means gives a
20 display instruction.

11. The cashless medium according to claim 9,
wherein said operation means outputs said result to an
external device.

12. A commercial transaction terminal device
25 comprising:

09E4E9E0.074400
004400.074400

according to claim 12, wherein

said tallying file means is connected to a bank center device on an off-line basis.

17. The commercial transaction terminal device
5 according to claim 12, wherein

said cashless medium stores an amount which can be used by a user of the cashless medium.

10

15

20

25

Abstract of the Disclosure

334T20-074400
An electronic cashless system uses a cashless
medium for memorizing amount information and for
5 performing an operation of amount information. The
electronic cashless system comprises an automatic
transaction terminal device having a reading/writing
unit for writing amount information to the cashless
medium, and a center device having a unit for
10 identifying the account balance of multiple accounts
and for storing amount information and a non-settled
fund file unit for storing amount information written
by the cashless medium and a seller ledger file means
for identifying the account balance of the multiple
15 seller's accounts and for storing amount information.

20

25

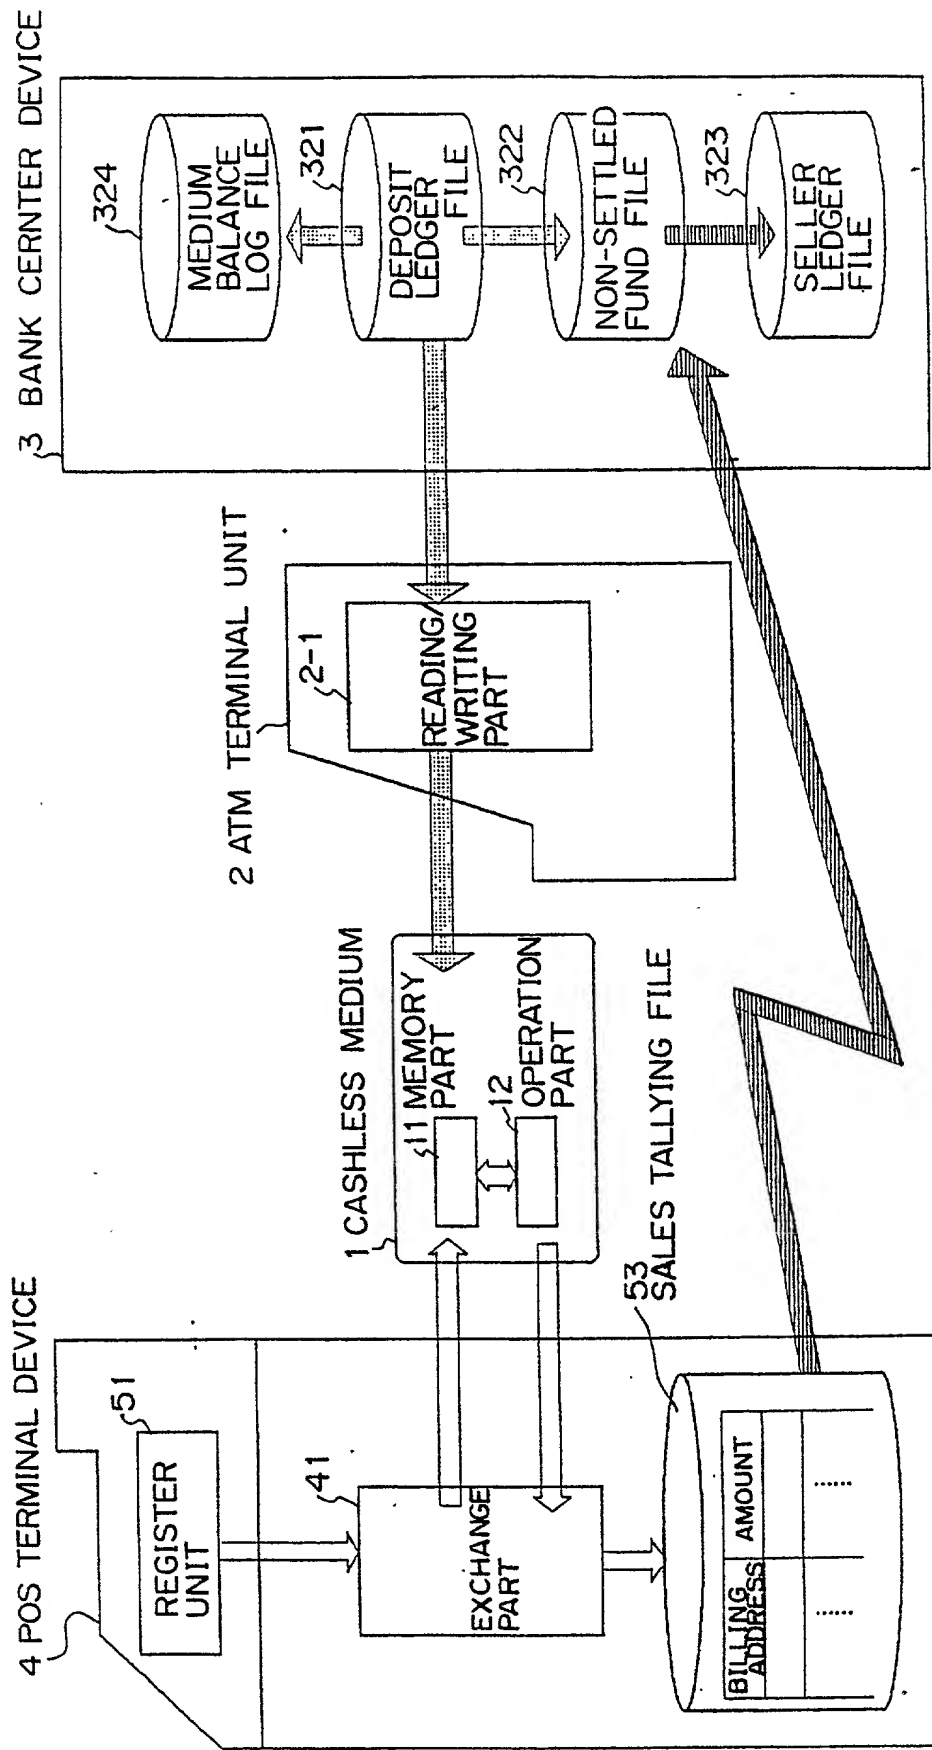


Fig. 1

21 MULTI-FUNCTION IC CARD

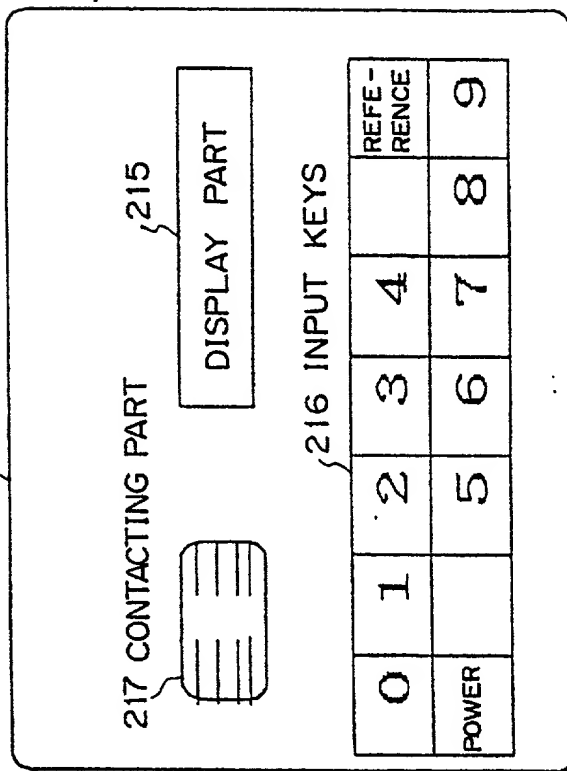


Fig. 2A

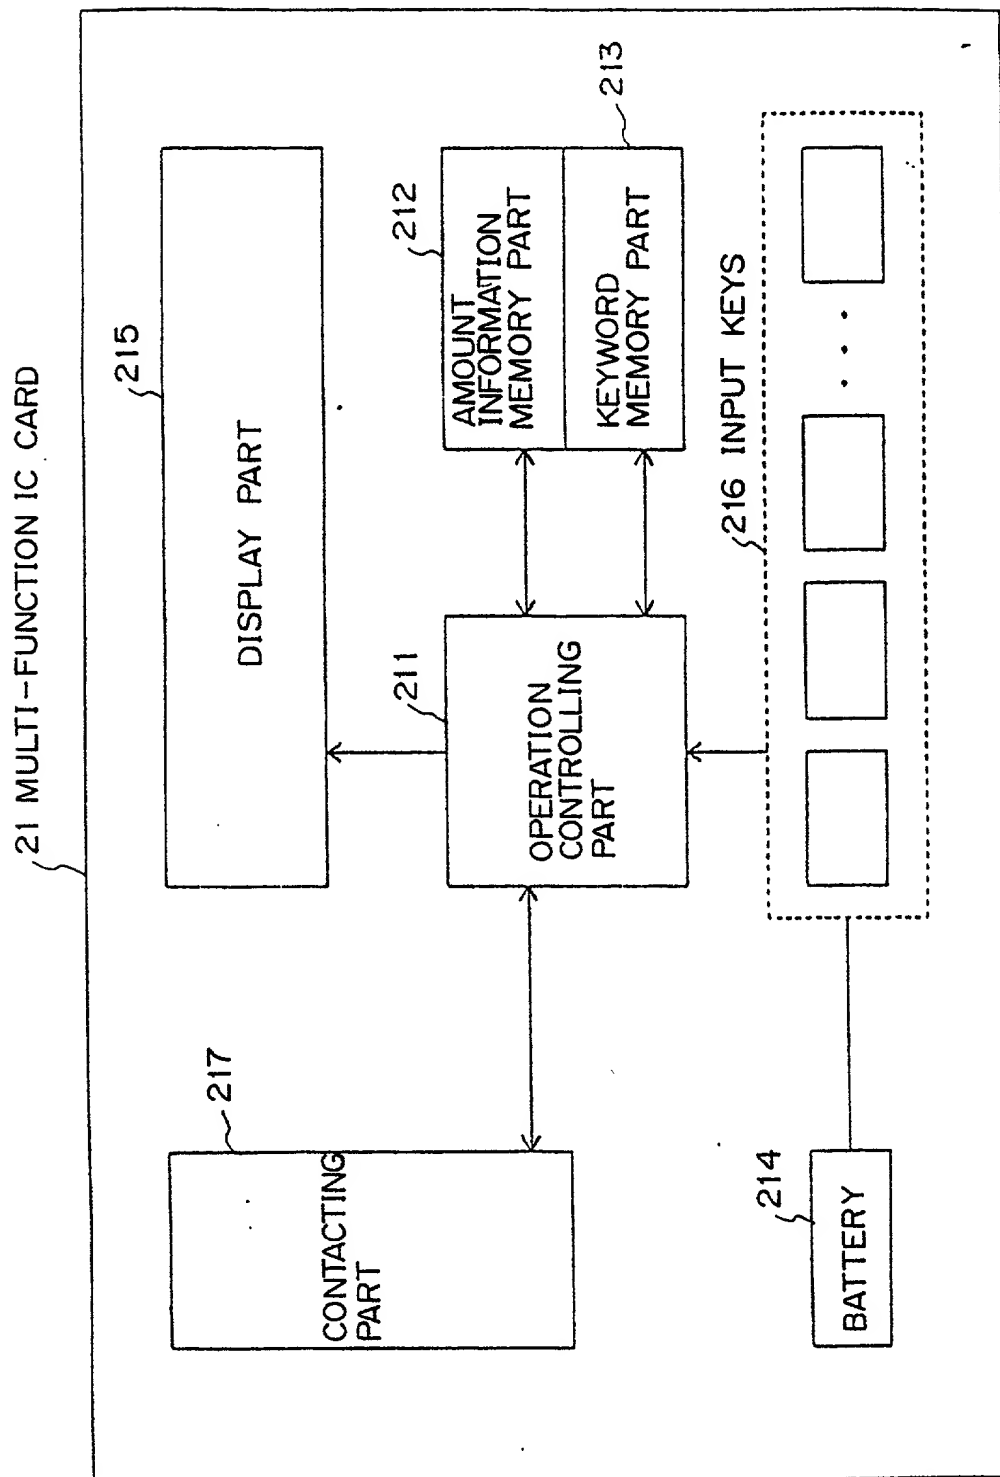


Fig. 2B


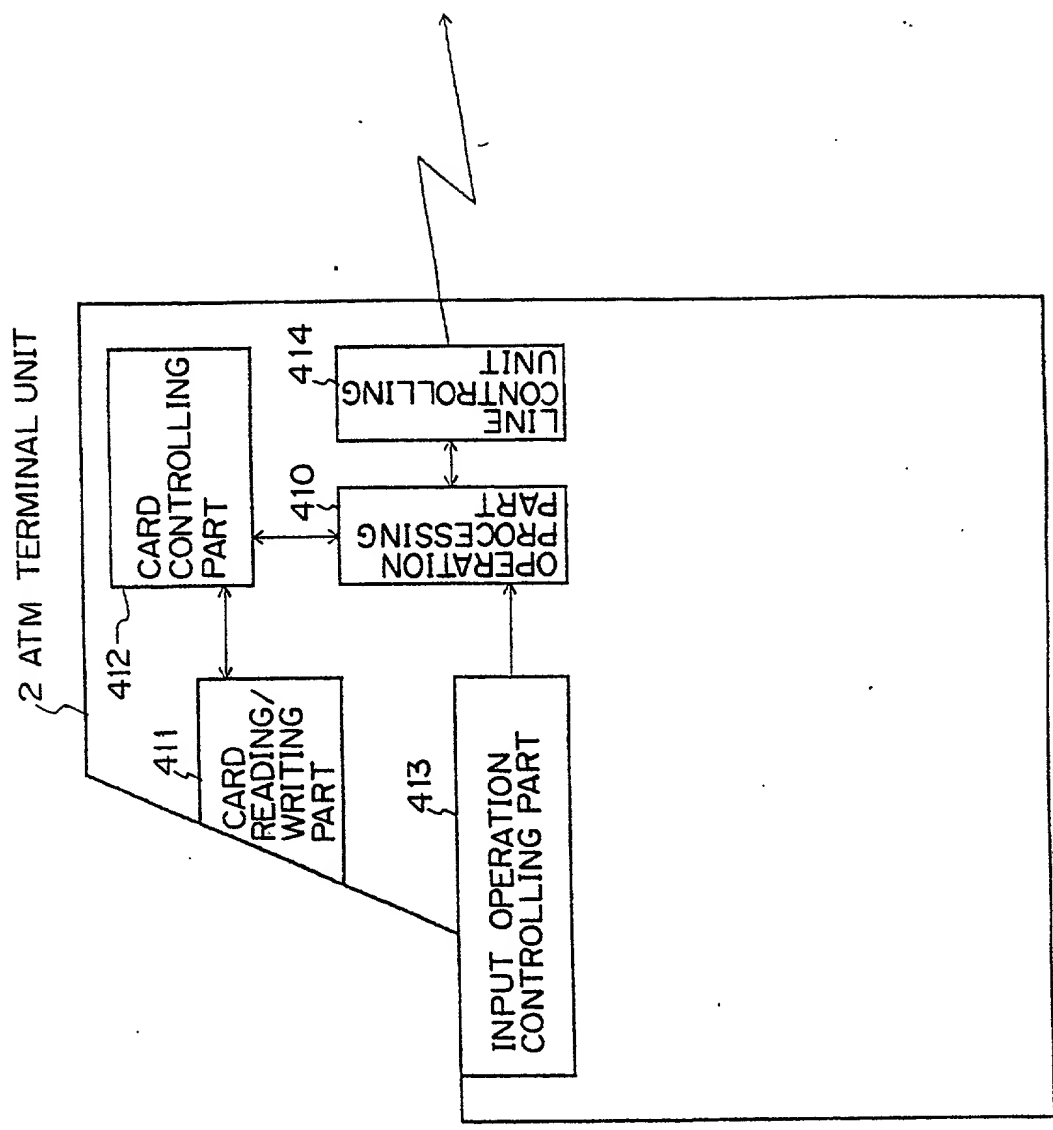


Fig.3

Fig. 4

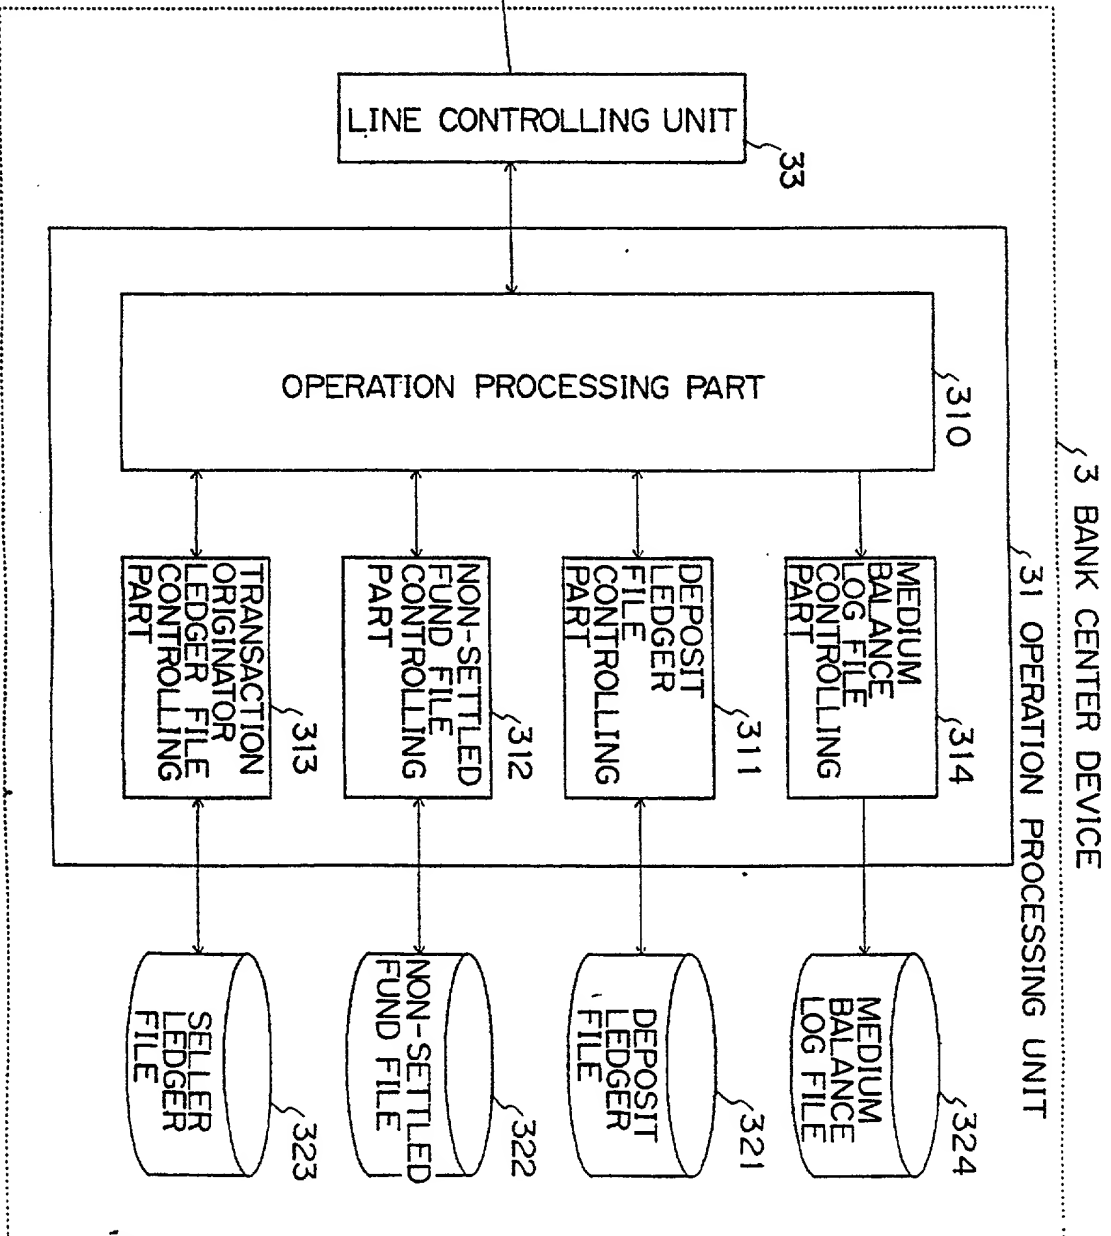

Copyright © 2000 by Intel Corporation

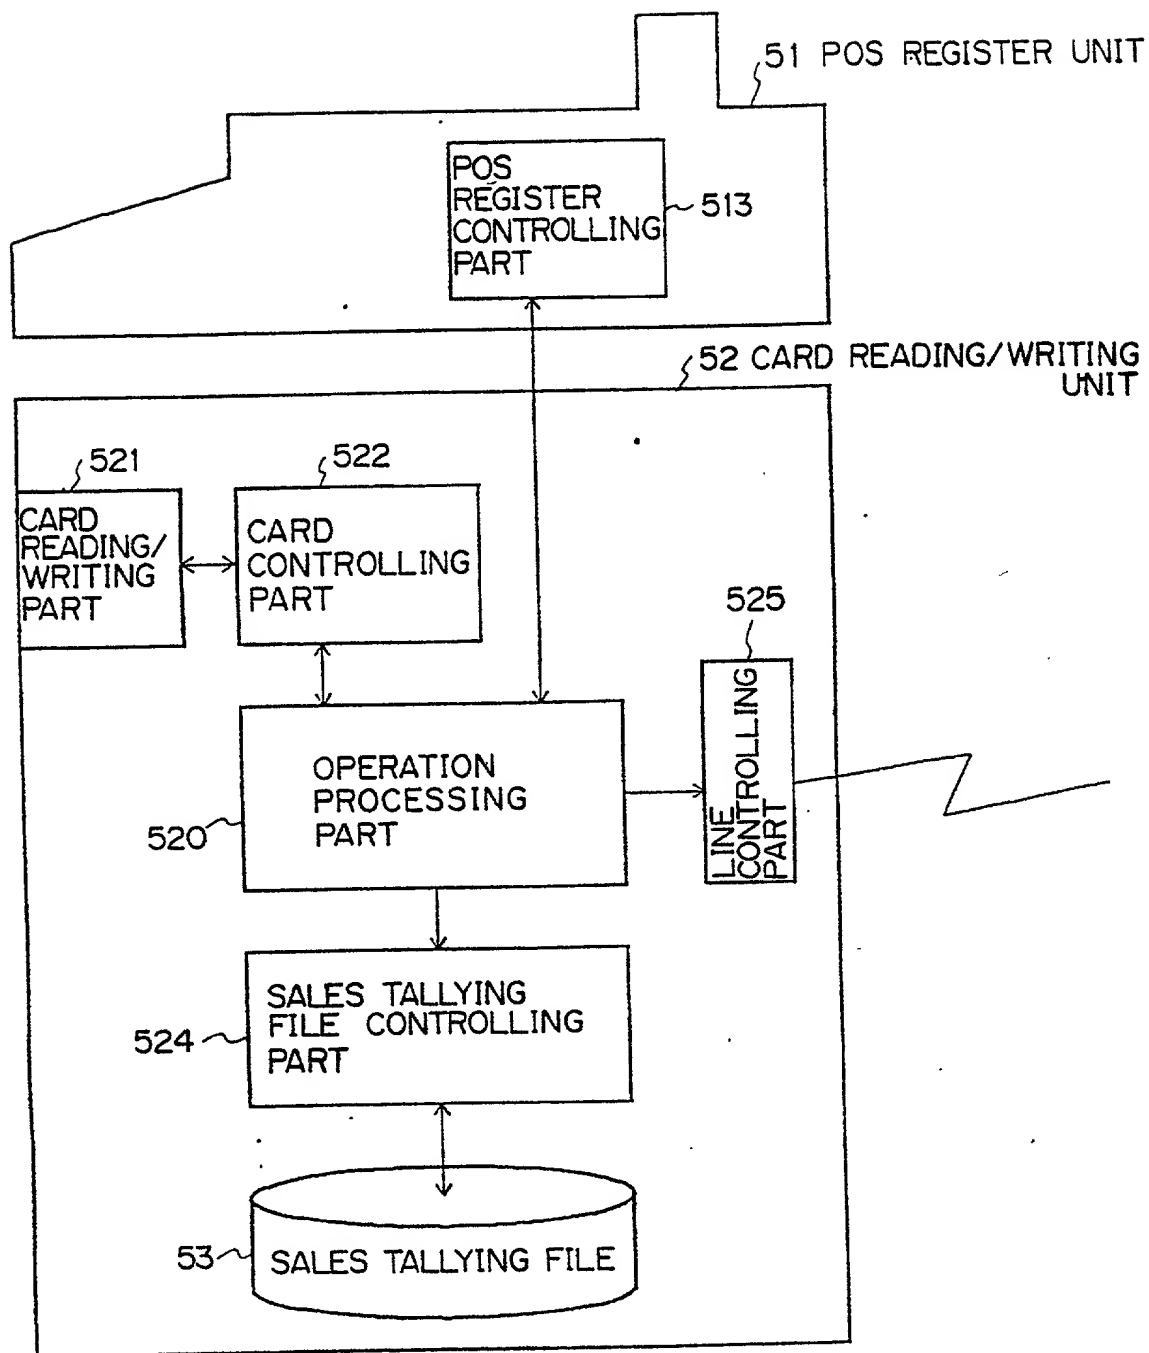


Fig. 5A

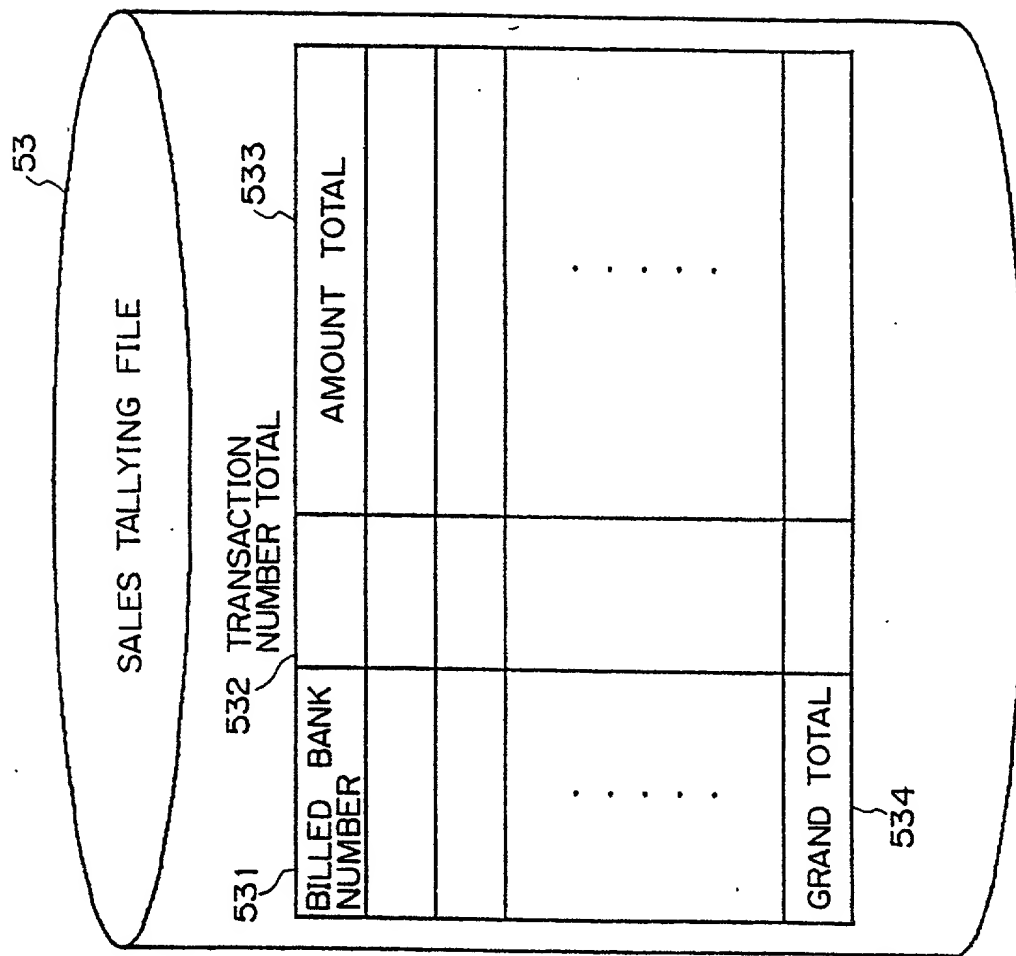


Fig. 5B

(WITHIN THE LIMIT NUMBER FOR INPUT OF)
(PERSONAL IDENTIFICATION CODE)

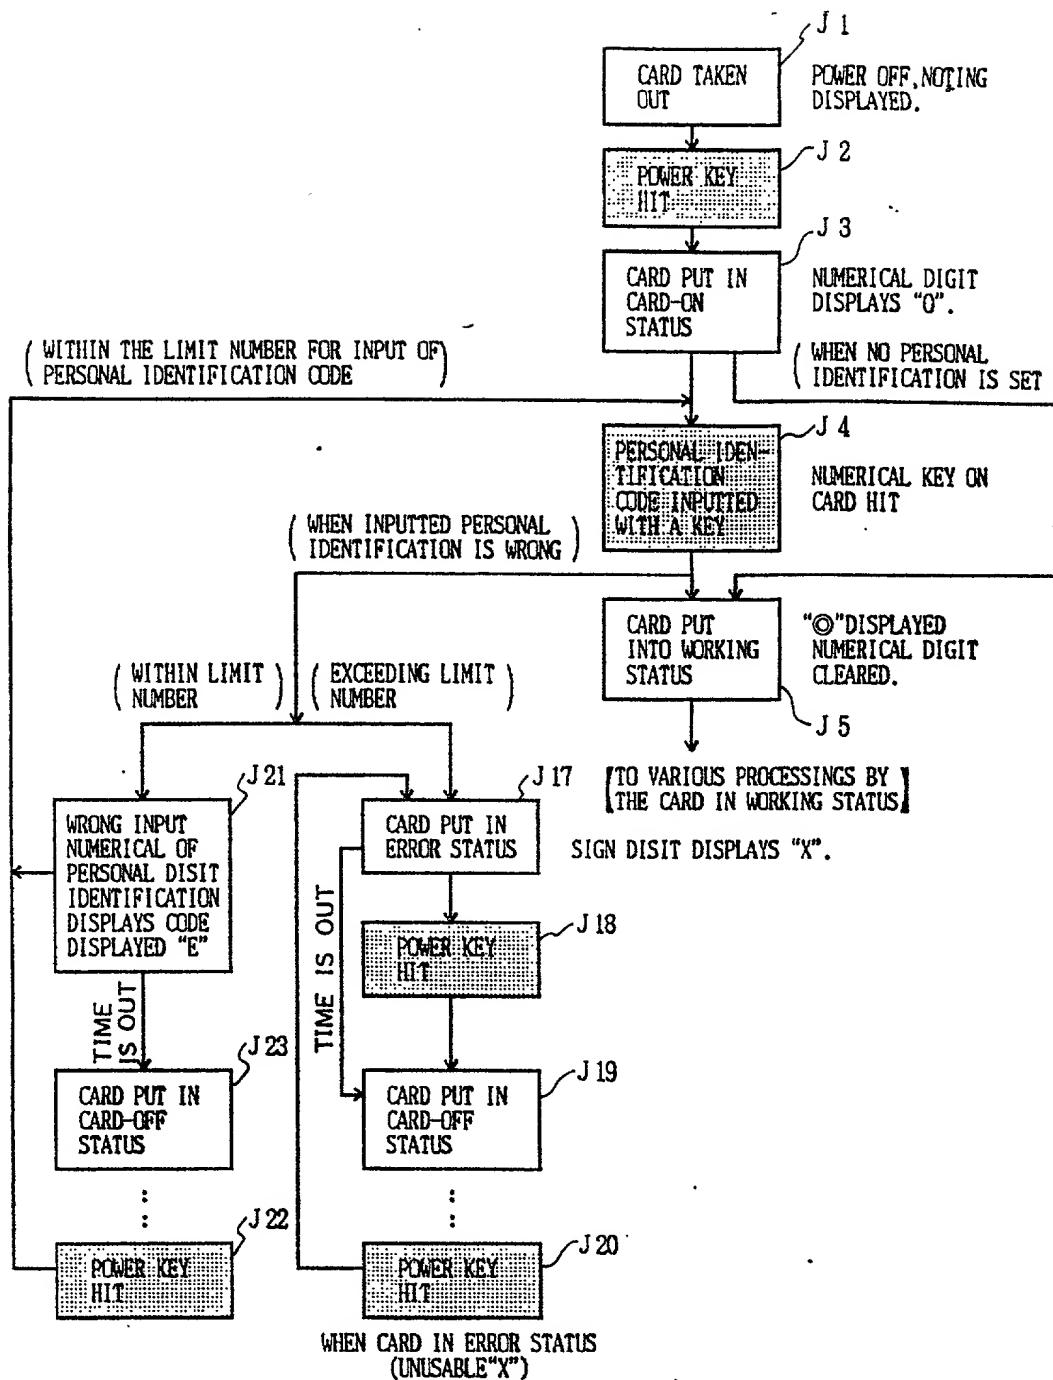


Fig. 6A

```

graph TD
    Start([CARD PUT INTO WORKING STATUS  
("O" DISPLAYED)]) -- J 5 --> RefKey1[REFERENCE KEY HIT  
"O" REMOVED]
    RefKey1 -- J 6 --> J7((J 7))
    J7 -- J 7 --> BalDisp[STORED BALANCE  
DISPLAYED ON  
DISPLAY PART  
e.g. "55,000"]
    BalDisp -- J 7 --> J15((J 15))
    BalDisp -- J 7 --> J14((J 14))
    J15 -- J 15 --> PowerKey[POWER KEY HIT]
    PowerKey -- J 16 --> CardOff1[CARD PUT IN  
CARD-OFF  
STATUS]
    J14 -- J 14 --> ZeroKey["0" KEY HIT]
    ZeroKey -- J 14 --> RefKey2[REFERENCE KEY HIT]
    RefKey2 -- J 8 --> J9((J 9))
    J9 -- J 9 --> DateDisp[DATE OF LAST  
TRANSACTION  
DISPLAYED  
e.g. "88.10.05-"]
    DateDisp -- J 9 --> J10((J 10))
    J10 -- J 10 --> RefKey3[REFERENCE KEY HIT]
    RefKey3 -- J 11 --> J12((J 12))
    J12 -- J 12 --> AmountDisp[AMOUNT OF LAST  
TRANSACTION  
DISPLAYED  
e.g. "-1,500"]
    AmountDisp -- J 12 --> J13((J 13))
    J13 -- J 13 --> RefKey4[REFERENCE KEY HIT]
    RefKey4 -- J 13 --> CardOff2[CARD PUT IN  
CARD-OFF  
STATUS]
    CardOff2 -- J 13 --> End([TIME IS OUT])
    
```

CARD PUT INTO WORKING STATUS ("O" DISPLAYED) ~ J 5
 [FROM VARIOUS PROCESSINGS BY THE CARD IN WORKING STATUS]
 REFERENCE KEY HIT "O" REMOVED ~ J 6
 J 7
 STORED BALANCE DISPLAYED ON DISPLAY PART e.g. "55,000"
 (IN CASE OF TERMINATING) (IN CASE OF PURCHASING)
 J 15
 POWER KEY HIT
 J 16
 CARD PUT IN CARD-OFF STATUS
 (WHEN THE TRANSACTION DETAIL IS REFERRED)
 J 14
 "0" KEY HIT
 "O" DISPLAYED (NUMERICAL DIGIT CLEARED.)
 [TO VARIOUS PROCESSINGS BY THE CARD IN WORKING STATUS]
 REFERENCE KEY HIT ~ J 8
 J 9
 DATE OF LAST TRANSACTION DISPLAYED e.g. "88.10.05-"
 J 10
 REFERENCE KEY HIT
 J 11
 AMOUNT OF LAST TRANSACTION DISPLAYED e.g. "-1,500"
 J 12
 REFERENCE KEY HIT
 J 13
 CARD PUT IN CARD-OFF STATUS
 TIME IS OUT
 TRANSACTION DETAIL OF A PREDETERMINED NUMBER DISPLAYED BEGINNING FROM THE MOST RECENT ONE
 AFTER DISPLAYING TRANSACTION DETAIL OF PREDETERMINED NUMBER TRANSACTION DETAIL IS DISPLAYED FROM BEGINNING AGAIN
 DISPLAY CAN BE ABORTED BY HITTING POWER KEY
 COMMERCIAL TRANSACTION PERFORMED WITH CARD WITH DISPLAY ABORTED BY HITTING 0 KEY

Fig. 6B

00420 696960

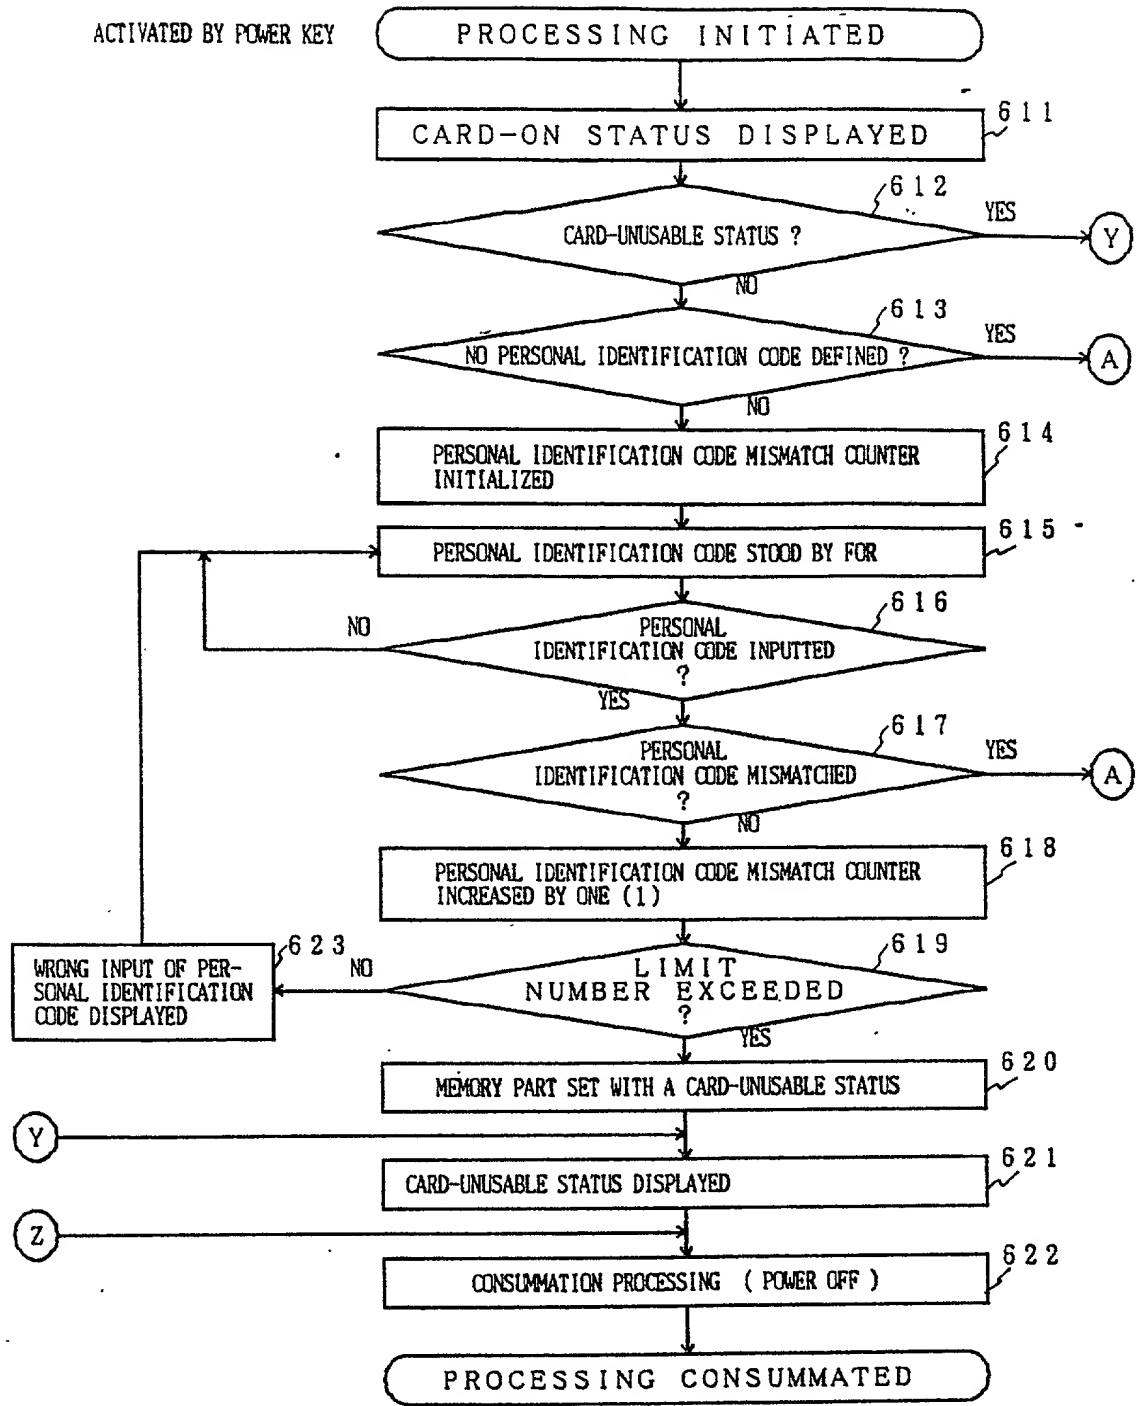


Fig. 7A

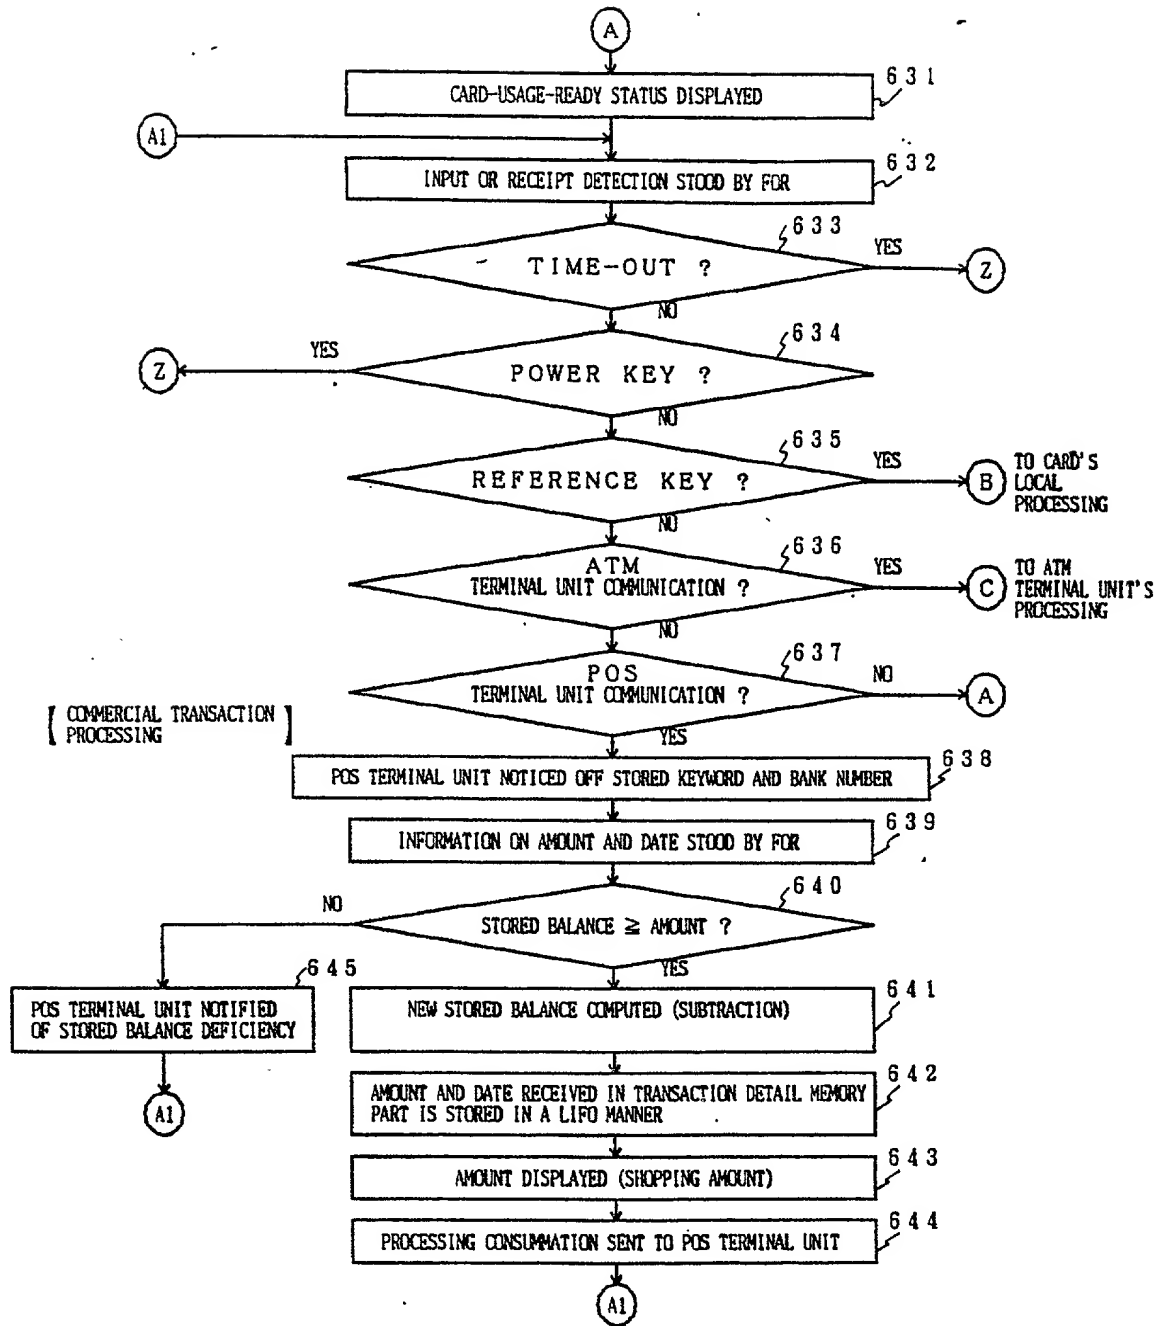


Fig. 7B

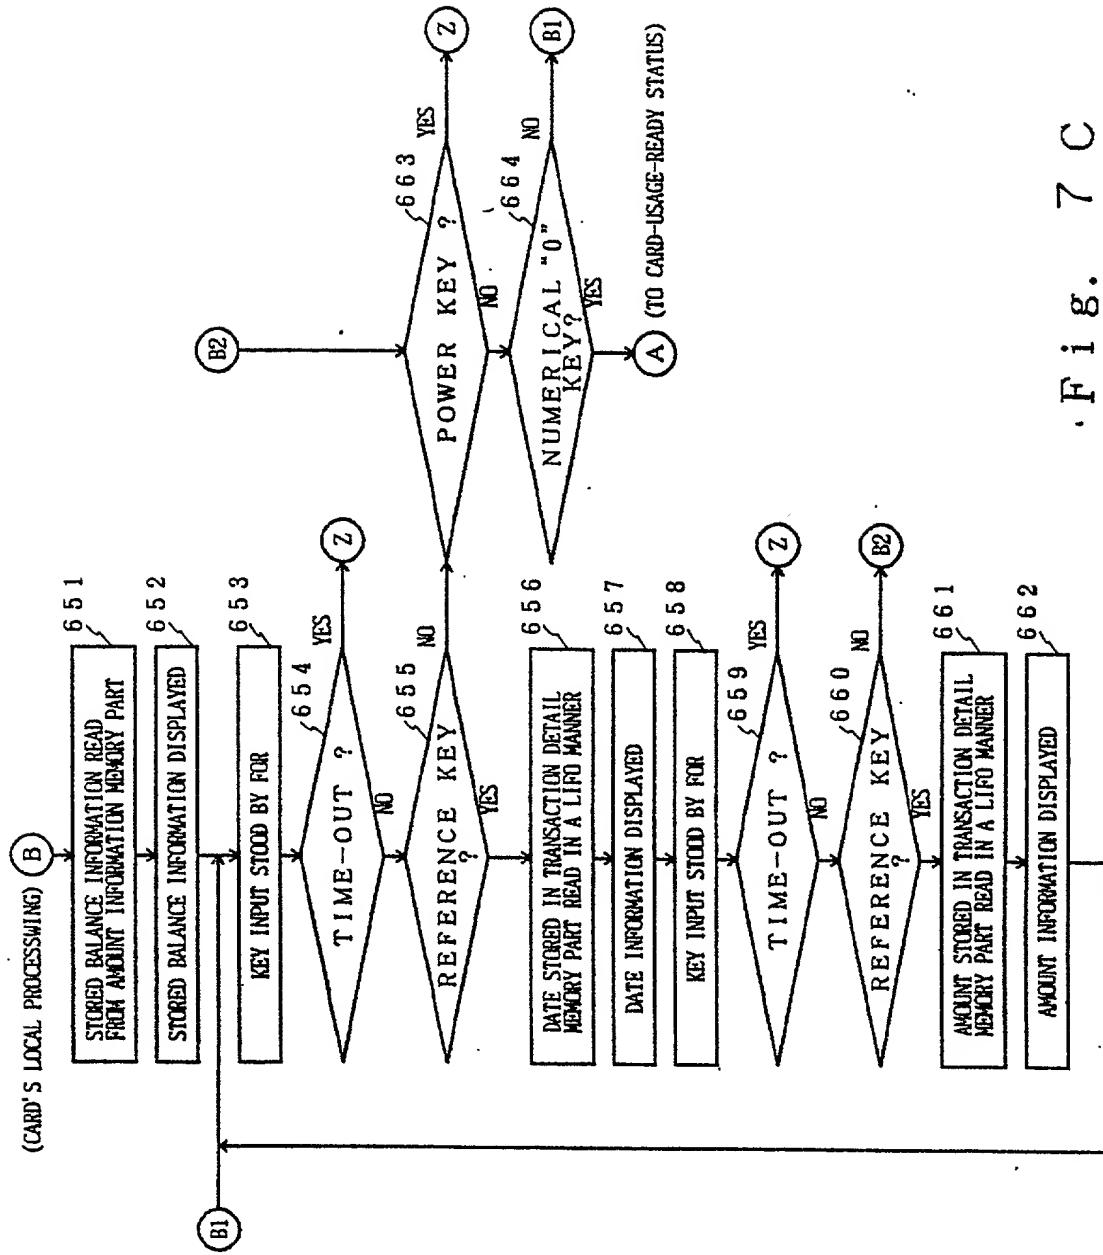


Fig. 7 C

000499-07400

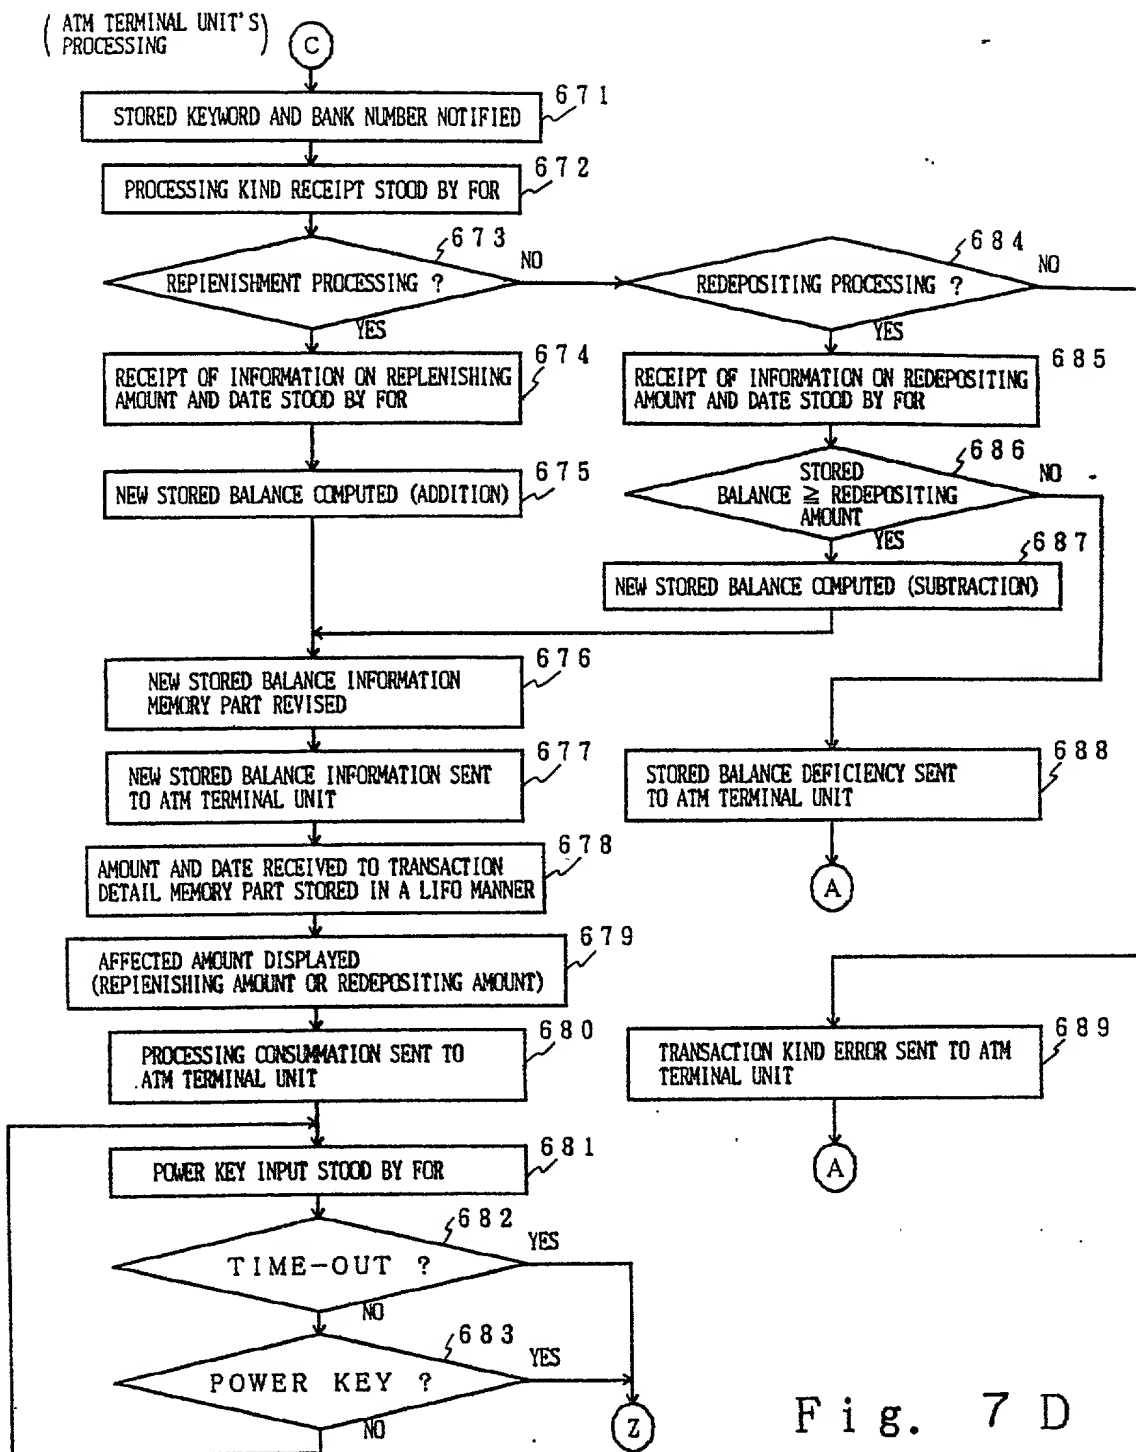


Fig. 7 D

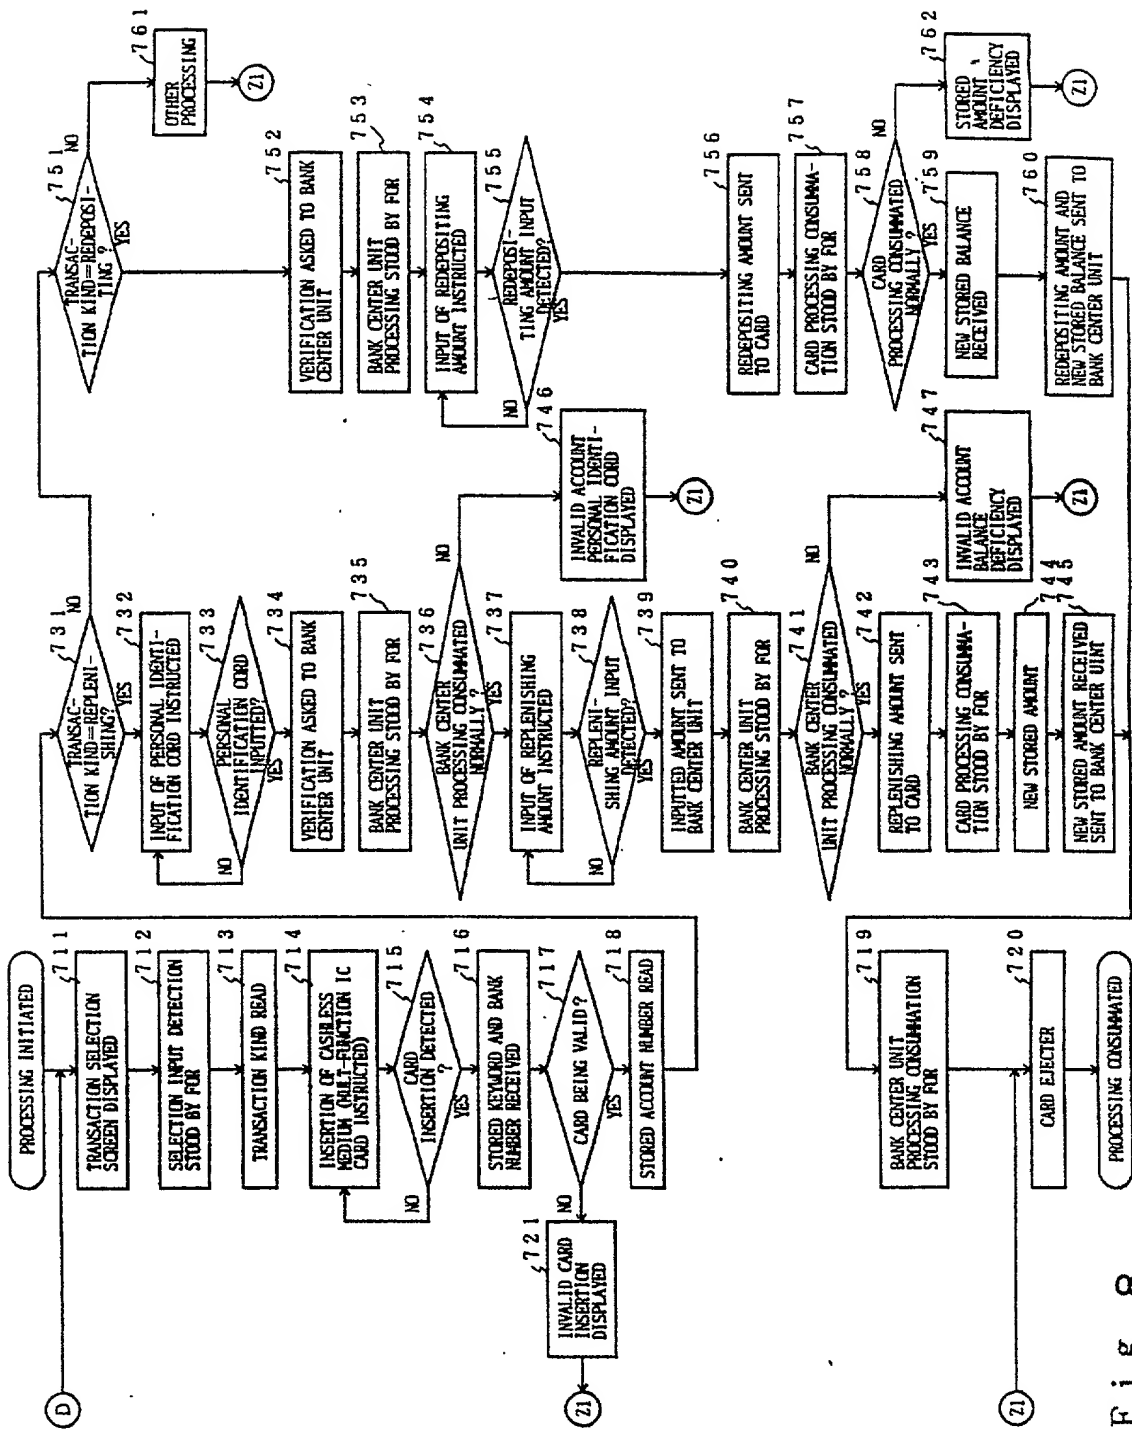


Fig. 8

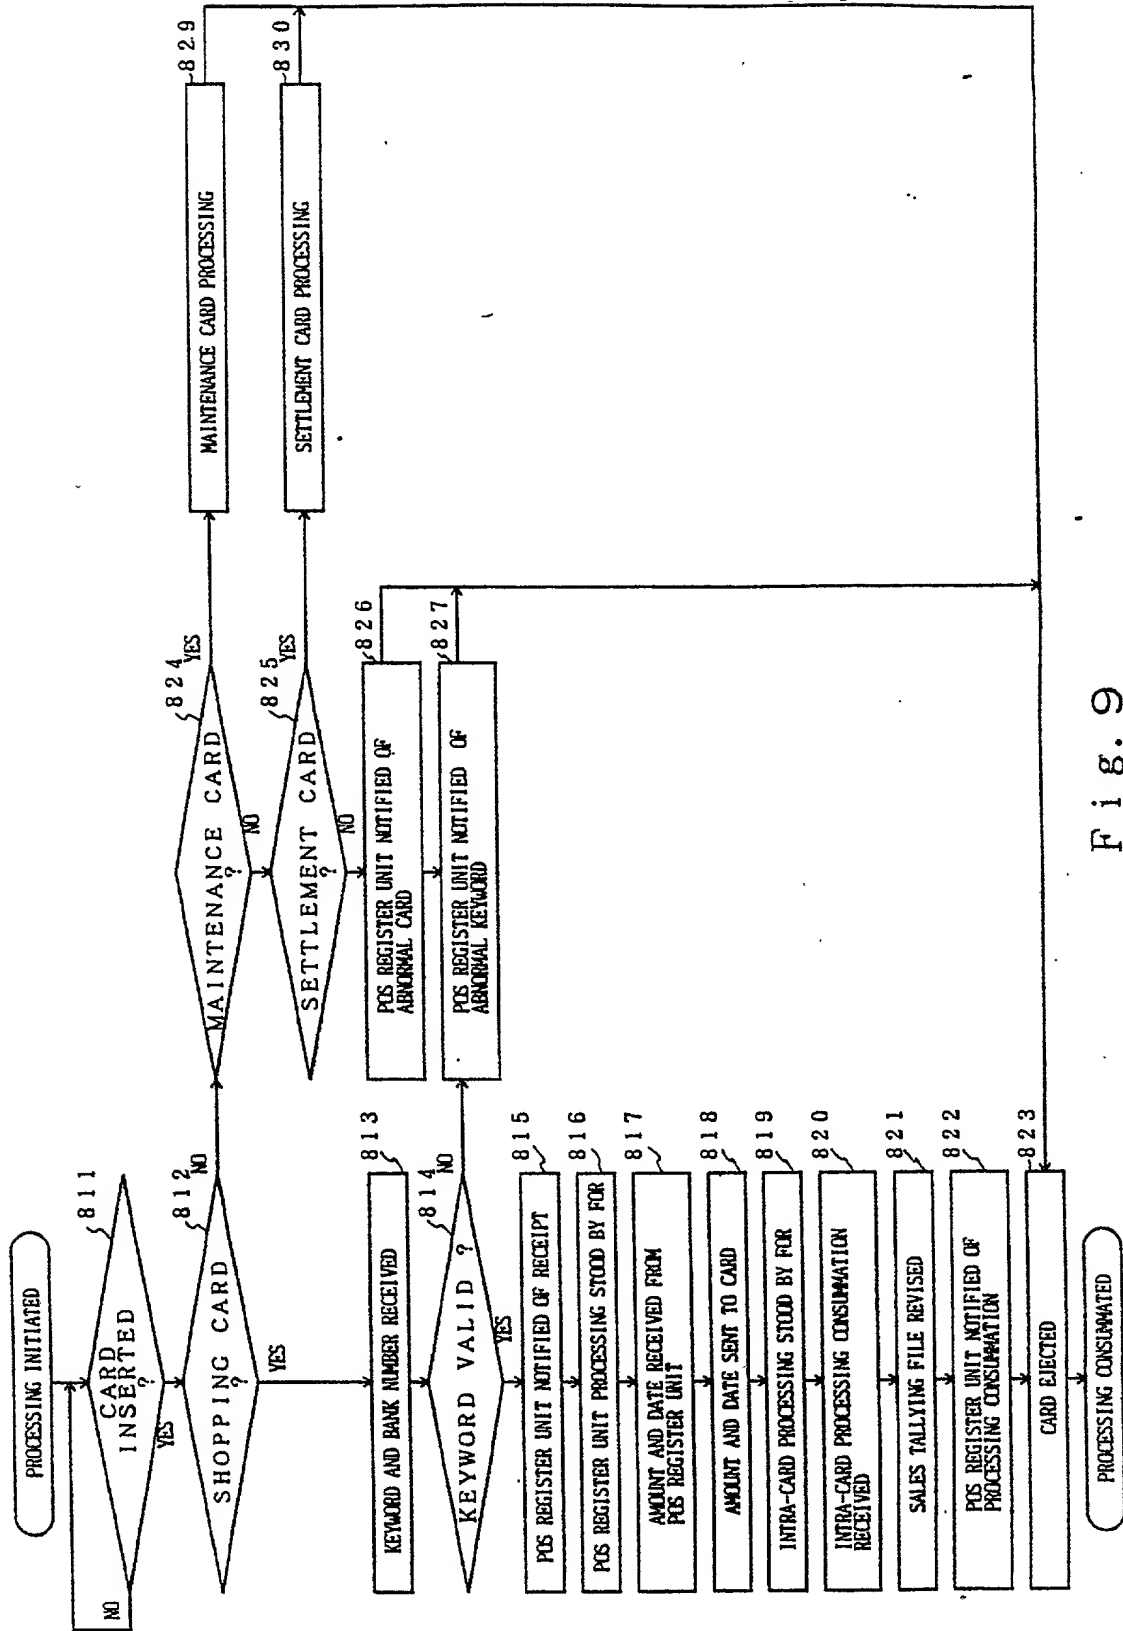


Fig. 9

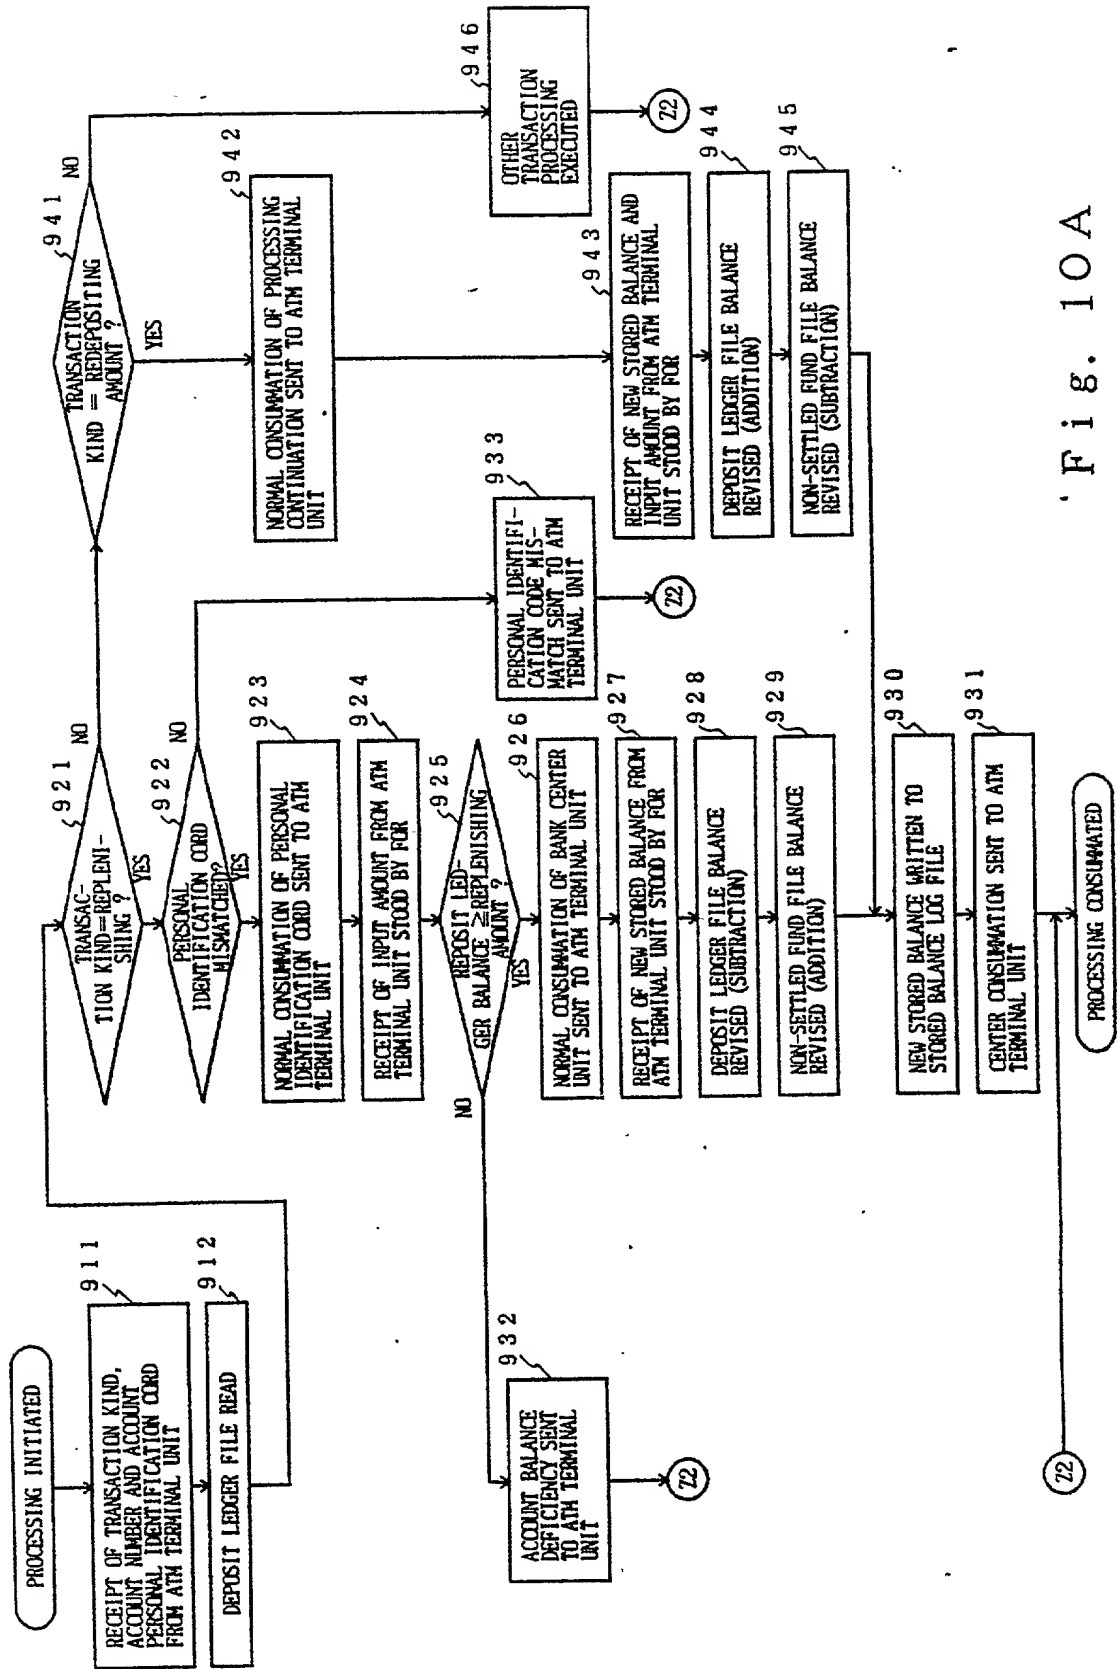


Fig. 10A

PROCESSING INITIATED

SALES TALLYING FILE DATA
OF POS TERMINAL UNIT
RECEIVED 951

RECEIPT CONSUMPTION SENT
TO POS TERMINAL 952

CODED PART OF RECEIVED
DATA DECODED 953

MATCHING CONFIRMATION WITH
ORDINARY TEXT PART 954

SALES TALLYING FILE VALID ? 955
YES

RECEIVED DATA STORED BY
BANK 956

HOME BANK DATA EXISTING ? 957
NO

EXTRA ORDINARY
PROCESSING OF SALES
TALLYING FILE 960

(Z3)

NON-SETTLED FUND FILE
BALANCE REVISED
(SUBTRACTION) 961

FOREIGN
BANK DATA EXISTING ? 958
NO


EXCHANGE BILLING DATA
CREATED 962

RETAILER LEDGER FILE
CREDITED 959

(Z3)

PROCESSING CONSUMMATED

Fig. 10B

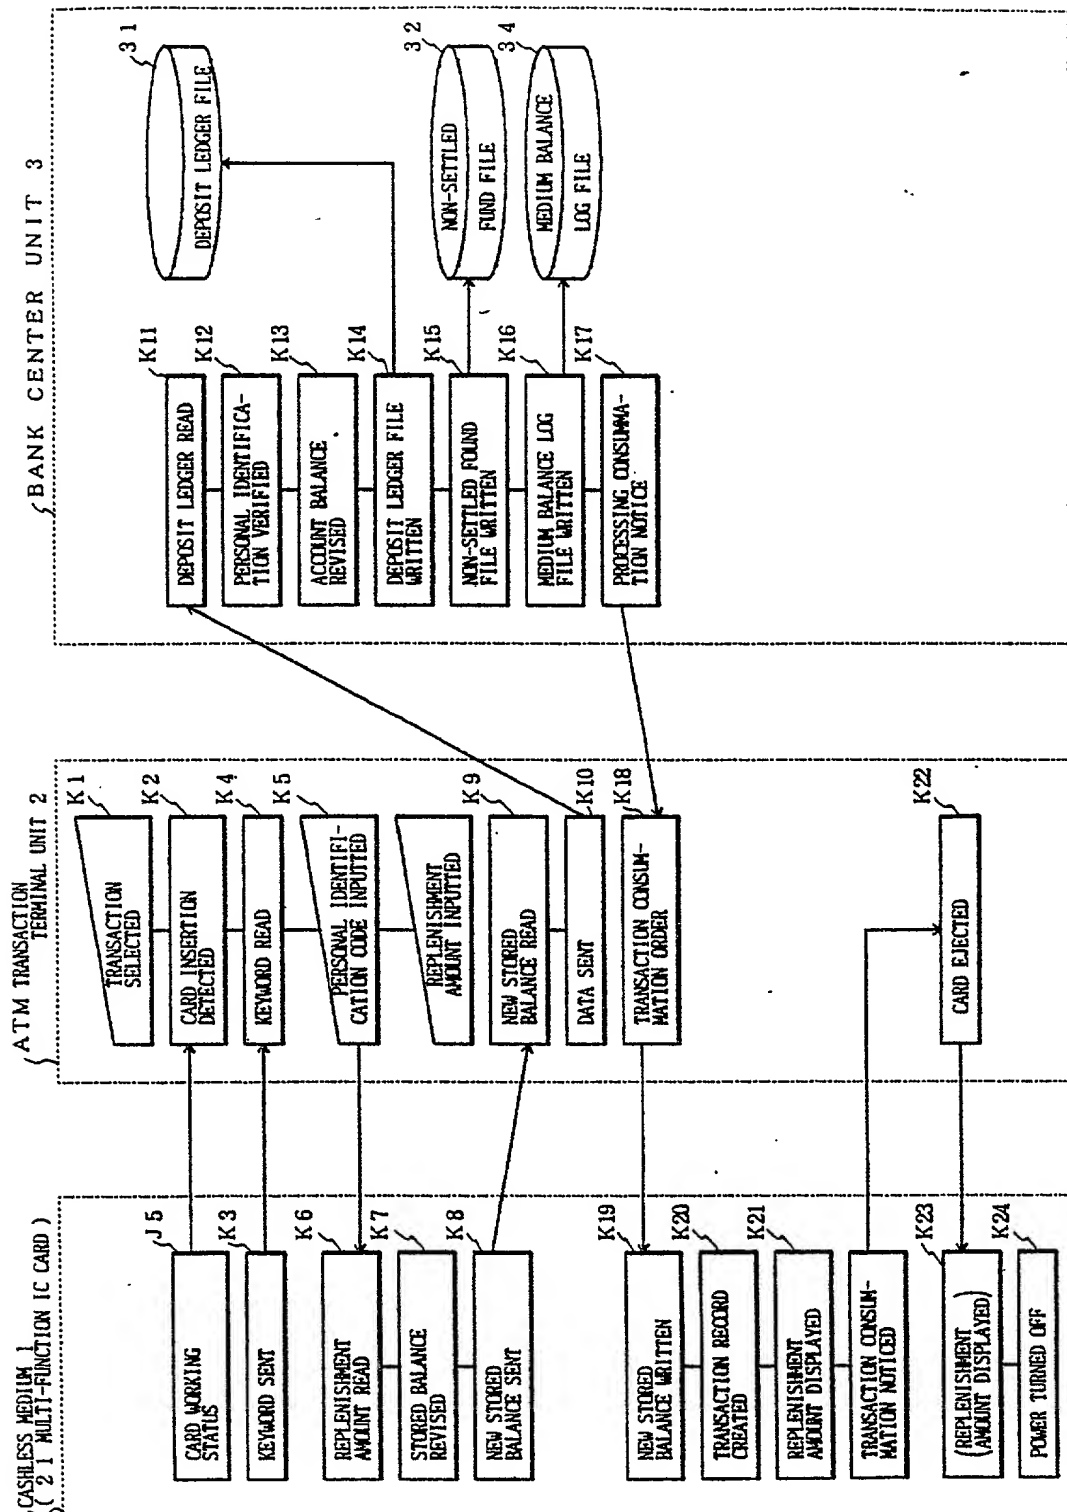

11
11
11
11
11

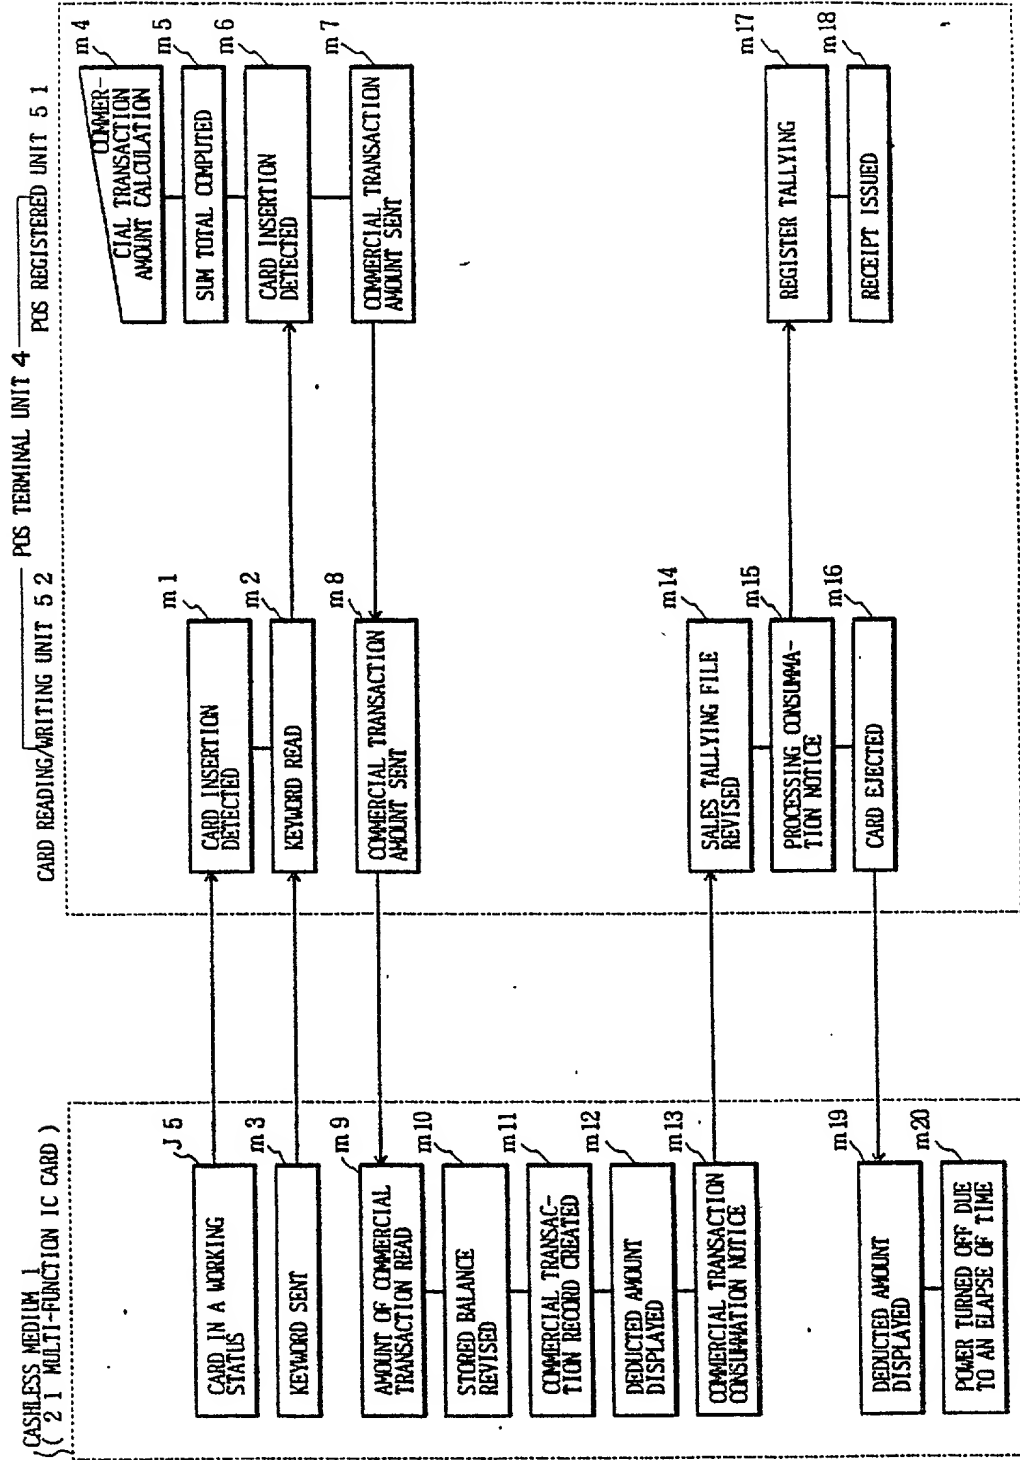


Fig. 12

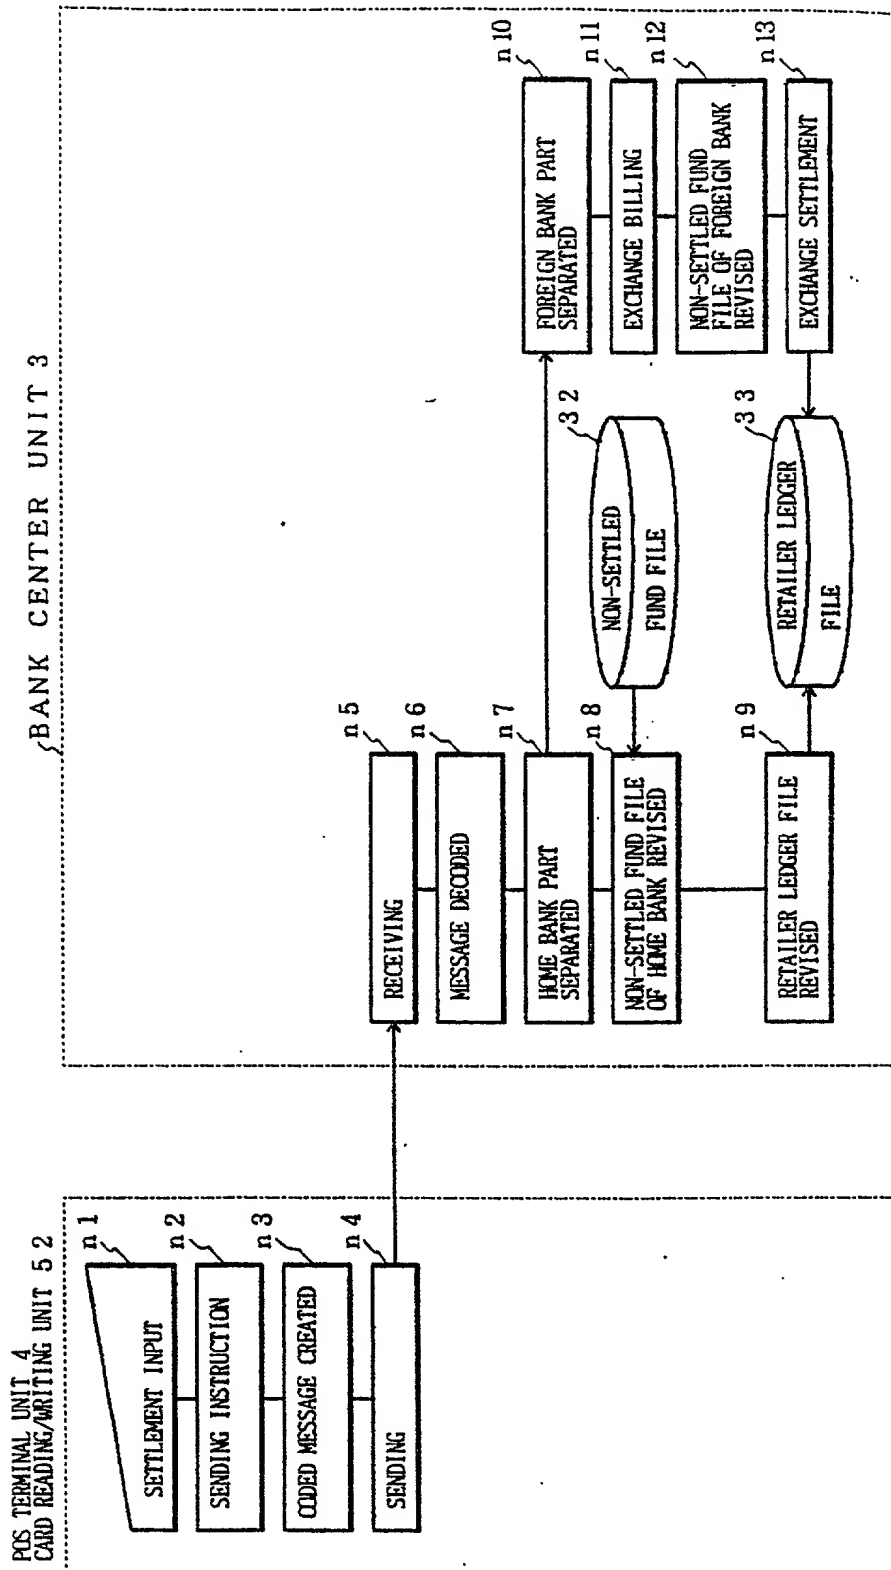


Fig. 13

As a below named inventor, I hereby declare that:

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled An Electronic Cashless System

Ex is attached hereto

(if applicable)

I hereby claim foreign priority benefit(s) under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37 Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
--------------------------	---------------	--

As a named inventor, I hereby appoint the following attorneys and agent: James D. Halsey, Jr., Reg. No. 22,729; Harry John Staas, Reg. No. 22,010; William D. Johnston III, Reg. No. 27,806; David M. Pitcher, Reg. No. 25,908; Gene W. Stockman, Reg. No. 21,021; John C. Garvey, Reg. No. 28,607; J. Randall Beckers, Reg. No. 30,358; William F. Herbert, Reg. No. 31,024; John P. Moran, Reg. No. 30,906; Carla M. Krivak, Reg. No. 30,956 (agent); Richard A. Gollhofer, Reg. No. 31,106 and Mark E. Miller, Reg. No. 31,401, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Direct telephone calls to:
(202) 872-0123

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of second joint inventor, if any _____
 Second Inventor's Signature _____ Date _____
 Residence _____
 _____ Citizenship _____
 Post Office Address _____

(Supply similar information and signature lines for third and subsequent joint inventors.)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

Shoji HAYASHIDA

Serial No. New

Filed: Herewith

:
:
:
:
:
:

Group Art Unit: N/A

Examiner: N/A



For: AN ELECTRONIC CASHLESS SYSTEM

REQUEST FOR CHANGE OF ADDRESS

Assistant Commissioner
for Patents
Washington, D.C. 20231

Sir:

Please correct the address of the undersigned attorney for applicants to:

STAAS & HALSEY LLP
700 Eleventh Street, N.W.
Suite 500
Washington, DC 20001

Respectfully submitted,
STAAS & HALSEY LLP

By:

Mehdi Sheikerz
Registration No. 41,307

700 Eleventh Street, NW
Suite 500
Washington, D.C. 20001
(202) 434-1500

Date: July 14, 2000